

“G.Y.” 牌 BSEN877 環氧塗層鑄鐵排水系列

“G.Y.” Brand BSEN877 Epoxy
Coated Cast Iron Drainage System



俊業五金鑄造有限公司
Gent-Year Metal Foundry Limited

公司簡介

INTRODUCTION



本公司是經銷水喉、渠務及建築行業使用的生鐵、球鐵產品的專業公司，其創立的品牌“G.Y.”牌各類產品確保質量，避免與其他牌子混淆。主要產品有符合BS416、BS437、BS4622、BSEN598、EN877標準的(規格 $\phi 50\text{mm}$ 至 $\phi 700\text{mm}$)鑄管及配件；符合BS497/EN124標準的生鐵/球鐵沙井蓋板及明渠梳冷；還有符合BSEN598及BSEN545的球鐵鑄管及配件以及可按客戶的要求或來圖生產特殊的非標準產品及不銹鋼等有色金屬精鑄產品等。

本公司在廣東省中山市自設鑄造工廠，生產廠房面積佔地 10,000m²，擁有經驗豐富的優秀技術管理人員及工人和現代化設備的廠房，用先進的技術生產符合客戶要求的高質產品。

為保障客戶的急需，本公司在新界元朗設有佔地 4,000m²的倉庫，儲存足夠應付日常需求的各類產品，保證及時送貨地盤。

多年來，隨著產品質量及服務質素的不斷提高，“G.Y.”牌產品獲得本港多間大型發展商、承建商及政府有關部門青睞。本著精益求精的精神，並參考客戶反饋的意見，繼續對產品進行改進，力求做到更好。

Our company is specialized in manufacturing pumping, drainage, cast-iron and ductile iron products for the construction industry. Our established “G.Y.” brand provides a variety of products with excellent quality and is highly differentiated from other brands. The main products include cast iron pipes and fittings, which comply with the BS416, BS437, BS4622, BSEN598 and EN877 (standards $\phi 50\text{mm}$ – $\phi 700\text{mm}$), manhole covers, frames and channel gratings, which meet BS497/EN124 standards and the BSEN598 and BSEN545 ductile iron pipes and fittings. We also manufacture bespoke products, including stainless steel products, in accordance with clients' specifications or drawings.

We set up 10,000 sqm foundry in Zhongshan, Guangdong, China. The foundry is staffed by experienced and highly skilled technicians and workers and well equipped with modernized facilities. To maintain the high quality of our products and satisfy the needs of our clients, we adopt the most advanced techniques in our manufacturing process.

In response to the urgent demands of our clients, we have a 4,000 sqm storage site in Yuen Long, N.T., Hong Kong with sufficient stock of our products available for timely delivery to any construction sites in Hong Kong.

Through continuous improvement in the quality of products and services over the years, our “G.Y.” products have been well recognized and adopted by many large developers, contractors and government departments in Hong Kong. We strive for betterment and value feedback from our clients. Therefore, we endeavor to further enhance our product quality and deliver exceptional services to our customers.

產品說明

PRODUCT INTRODUCTION



CASTCO 佳力高試驗中心有限公司
CASTCO TESTING CENTRE LIMITED

Summary of Test Results

Customer: Casto-Yuan Metal Industry Limited
Address: 8/F, Wing Shui Building, No. 41, Castle Peak Road, Yuen Long, N.T., Hong Kong
Sample description: Epoxy Coated Cast Iron Pipes & Fittings
Manufacturer: Wai Yee City Kow Yee Metal Products Co., Ltd.
Standard: BSEN 877:1999-01-2008
Test period: 21 August 2020 to 10 November 2020

Reference no.: EP02000007-0200-07

Type	DN (mm)	Specimens
Pipes	100	EP0200001-135
	125	EP0200002-138
	150	EP0200003-139
	175	EP0200004-140
	200	EP0200005-141
	225	EP0200006-142
	250	EP0200007-143
	275	EP0200008-144
	300	EP0200009-145
	350	EP0200010-146
Couplings	100	EP0200011-147
	125	EP0200012-148
	150	EP0200013-149
	175	EP0200014-150
	200	EP0200015-151
	225	EP0200016-152
	250	EP0200017-153
	275	EP0200018-154
	300	EP0200019-155
	350	EP0200020-156
Fittings	100	EP0200021-157
	125	EP0200022-158
	150	EP0200023-159
	175	EP0200024-160
	200	EP0200025-161
	225	EP0200026-162
	250	EP0200027-163
	275	EP0200028-164
	300	EP0200029-165
	350	EP0200030-166

Page 1 of 20

香港新界元朗區新田圍村中一號 - 8/F, Testco Centre, 33, On Kai Street, Tuen Mun, Hong Kong
香港新界元朗區新田圍村中一號 - 1/F, Testco Plaza, 33, On Kai Street, Tuen Mun, Hong Kong
香港新界元朗區新田圍村中一號 - 2/F, On Kai Street, Tuen Mun, Hong Kong
Tel: 2987 8233 Fax: 2987 8238 E-mail: info@castco.com.hk Website: www.castco.com.hk

CASTCO 佳力高試驗中心有限公司
CASTCO TESTING CENTRE LIMITED

Summary of Test Results

Customer: Casto-Yuan Metal Industry Limited
Address: 8/F, Wing Shui Building, No. 41, Castle Peak Road, Yuen Long, N.T., Hong Kong
Sample description: Epoxy Coated Cast Iron Pipes & Fittings
Manufacturer: Wai Yee City Kow Yee Metal Products Co., Ltd.
Standard: BSEN 877:1999-01-2008
Test period: 21 August 2020 to 10 November 2020

Reference no.: EP02000007-0200-07

Type	DN (mm)	Specimens
Pipes	100	EP0200001-135
	125	EP0200002-138
	150	EP0200003-139
	175	EP0200004-140
	200	EP0200005-141
	225	EP0200006-142
	250	EP0200007-143
	275	EP0200008-144
	300	EP0200009-145
	350	EP0200010-146
Couplings	100	EP0200011-147
	125	EP0200012-148
	150	EP0200013-149
	175	EP0200014-150
	200	EP0200015-151
	225	EP0200016-152
	250	EP0200017-153
	275	EP0200018-154
	300	EP0200019-155
	350	EP0200020-156
Fittings	100	EP0200021-157
	125	EP0200022-158
	150	EP0200023-159
	175	EP0200024-160
	200	EP0200025-161
	225	EP0200026-162
	250	EP0200027-163
	275	EP0200028-164
	300	EP0200029-165
	350	EP0200030-166

Page 2 of 20

香港新界元朗區新田圍村中一號 - 8/F, Testco Centre, 33, On Kai Street, Tuen Mun, Hong Kong
香港新界元朗區新田圍村中一號 - 1/F, Testco Plaza, 33, On Kai Street, Tuen Mun, Hong Kong
香港新界元朗區新田圍村中一號 - 2/F, On Kai Street, Tuen Mun, Hong Kong
Tel: 2987 8233 Fax: 2987 8238 E-mail: info@castco.com.hk Website: www.castco.com.hk

1. “G.Y.”牌環氧塗層鑄鐵排水管及其配件是符合BSEN877:1999標準。
2. 其生鐵管是採用離心式鑄造，具有管徑標準，表面平滑，重量輕，強度高及環保等優點。表面噴有環氧樹脂漆，致使內外表面光滑美觀，且此油漆具有防止生銹腐蝕，遇火警不會釋放出有毒氣體等性能，同時提高鑄鐵耐用，無噪音，適用於排水和通風系統。
3. 其安裝所用的為316不銹鋼喉箍，符合EN10088-1、EN10088-2及EN10088-3的標準。它可通過最大0.5bar的水壓，同時也可以應用於較小的角撓度。易安裝，接駁方便，節省人力及時間，喉箍內的膠圈也符合BSEN681-1的標準，其材質具有抗磨，耐油、耐酸等抗腐蝕性能，還有耐冷熱水、避震、不滲漏等優點。
4. 總括，本產品具有防磨損、防腐、防火、防震，重量輕、可環保、美觀耐用，且安裝維修方便，節省人力、物力、財力及時間，特別適用於高層的永久性建築。

1. “G.Y.” epoxy coated cast iron pipes and fittings comply with the BSEN877:1999 standard.
2. Manufactured by centrifugal method, the cast iron pipes are compatible with the standardized pipe diameter, smooth in surface, light in weight, high-strength and environmentally friendly. The surface is sprayed with epoxy paint to provide the smooth and beautiful inner and outer surfaces. The paint also equips the pipes with the properties of preventing rust and corrosion and does not emit toxic gases in case of fire. At the same time, the paint strengthens both durability and soundproofing of the cast iron, making the cast iron pipes the perfect choice for drainage and ventilation systems.
3. The 316 stainless-steel couplings used in the installation conform to the EN10088-1, EN10088-2 and EN10088-3 standards. The couplings can pass the maximum water pressure of 0.5bar and can be applied to the smaller angular deflection at the same time. Easy to install and connect and economical, the gaskets also conform to the BSEN681-1 standard. The materials provide optimum protection against abrasion, oil, acid, extreme temperatures, vibration and leakage.
4. All in all, this product has the advantages of good resistance to abrasion, corrosion, fire and vibration, light weight, environmental friendliness, sleek appearance, long durability, easy installation and maintenance and cost effectiveness; hence, the product is particularly suitable for high-rise permanent buildings.

生產程序

Production Process



工作範圍 Job Reference

發展商

地址



映御 太子道西195號項目 元朗 PARK YOHO 海璇
元朗 GRAND YOHO 御半山 海天晉 藍塘傲



西摩道4A-4P號



上環忠正街8號 藝里坊1號 元朗孖峰嶺路 翠峰
啟德沐泰街7號項目 莊士敦道206-212號商業項目



九肚山麗坪路 名日·九肚山



屯門掃管笏路 上源



中國建築國際集團有限公司
CHINA STATE CONSTRUCTION INTERNATIONAL HOLDINGS LIMITED

泓碧 (ALTISSIMO)



謝菲道239-243酒店項目



中環街市活化項目 觀塘裕民坊重建項目

建築署

地址



東九文化中心



粉嶺芬園已婚初級警務人員宿舍重建計劃



天水圍第107區泳池及休憩用地



SFK Construction Holdings Limited
新福港建設集團有限公司



大陸工程公司
CONTINENTAL
ENGINEERING CORP

啟德車站廣場一期



精進建築有限公司
AGGRESSIVE CONSTRUCTION
COMPANY LIMITED

啟德車站廣場二期



興勝建築有限公司
HANISON CONSTRUCTION COMPANY LIMITED

大埔第1區體育館、社區會堂及足球場



啟德發展區的稅務大樓



公和·安勝·華登

長沙灣東京街1所設有30間課室的小學

香港房屋委員會

地址



天水圍 屏欣苑



協興建築
HIP HING CONSTRUCTION

大埔 富蝶邨

粉嶺皇后山1期 房署地盤



瑞安建築
SOCAM DEVELOPMENT

柴灣道 公屋地盤 啟德發展區1G1(B)地盤資助房屋計劃建築工程 蘇屋邨第一期及第二期公屋發展計劃
柴灣永泰道公共房屋發展 石硤尾(村)第三、六及七期公屋發展計劃 黃大仙豐盛街公屋發展



俊和建築工程有限公司
CROWN WO CONSTRUCTION & ENGINEERING CO., LTD.

曉明街公營房屋發展計劃的建築工程

白田邨重建計劃第七及八期



保華集團有限公司
PYI Corporation Limited

彩福邨第三期公共房屋及彩榮路體育館發展計劃地盤

東涌27區 房署地盤



精進建築有限公司
AGGRESSIVE CONSTRUCTION
COMPANY LIMITED

東涌第54區資助出售房屋發展計劃建築工程



中國建築國際集團有限公司
CHINA STATE CONSTRUCTION INTERNATIONAL HOLDINGS LIMITED

屯門54區3及4(東)號地盤公營房屋發展計劃

青衣青鴻路公共房屋發展計劃

其他公共設施

港珠澳大橋香港相關工程項目 香港故宮文化博物館 亞洲博覽館臨時醫院 蓮塘 / 香園圍口岸工程 海洋公園酒店及水世界
啟德體育園Kai Tak Sports Park 竹高灣臨時檢疫中心(隔離營) 八鄉少年警訊中心(隔離營) 鯉魚門公園度假村(隔離營)

"G.Y."牌BSEN877 安裝方法

"G.Y." Brand BSEN877 Installation Method

1

鬆開喉箍，將喉箍連膠圈套在下部的管或配件一端

Unfasten the stainless-steel coupling, and then fit the coupling and rubber gasket onto the lower end of the pipe/fitting



2

再將另一端的管或配件放入喉箍的膠圈內

Place the other end of the pipe / fitting into the rubber gasket



3

將喉箍上的螺絲收緊即可

Tighten the bolt on the coupling.




註: 切口必須清理乾淨後塗上環氧樹脂修補，等乾後再安裝

Note: Please ensure that all cutting edges of the cast iron pipes and fittings are dry and clean before applying the epoxy paint and that let the paint dry completely before installation.

5

“G.Y.”牌BSEN877 環氧塗層鑄鐵排水直管

“G.Y.” Brand BSEN877 Epoxy Coated
Cast Iron Drainage System Pipes

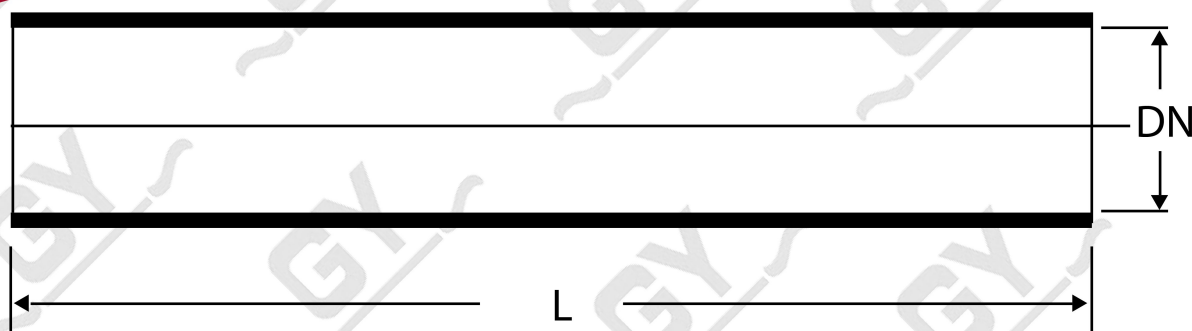


公稱直徑DN (mm)	管身外徑(毫米) Outer Diameter (mm)		壁厚(毫米) Wall Thickness (mm)		單重 Unit Weight	長度 (毫米) L (mm)
	公稱外徑 Nominal Size	外徑公差 Tolerance	外徑壁厚 Nominal Size	最小壁厚 Minimum Size	公斤/支 kg/pc	
50	58	+2 -1	3.5	3.0	13.3	3000 + / -20
75	83		3.5	3.0	18.9	
100	110		3.5	3.0	25.2	
150	160	+2 / -2	4.0	3.5	42.2	
200	210	+2.5 -2.5	5.0	4.0	69.2	
250	274		5.5	4.5	99.8	
300	326		6.0	5.0	129.7	

“G.Y.” 牌 BSEN877環氧塗層鑄鐵排水配件

“G.Y.” Brand BSEN877 Epoxy Coated Cast Iron Drainage System Fittings

“G.Y.”


牌BSEN877 45°無口邊
Brand BSEN877 45° Bend

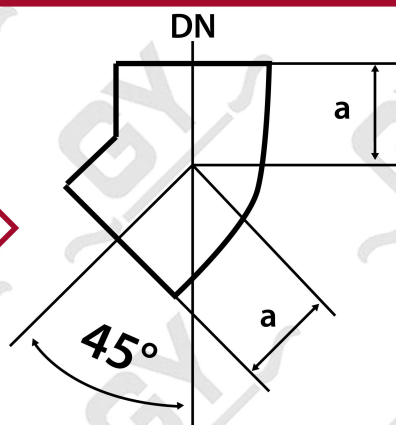

公稱直徑 Nominal Size DN (mm)	a (mm)
50	50
75	60
100	70
150	90
200	110
250	135
300	155

“G.Y.”

牌BSEN877 88°無口邊
Brand BSEN877 88° Bend

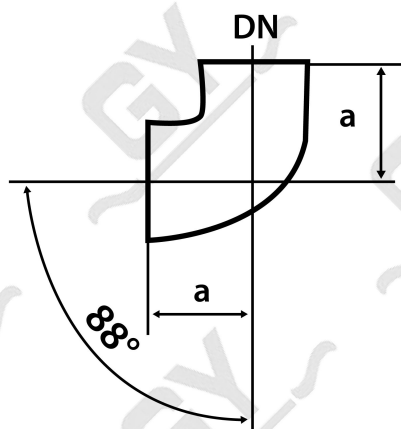


公稱直徑 Nominal Size DN (mm)	a (mm)
50	75
75	95
100	110
150	145
200	175
250	220
300	260

“G.Y.”

牌BSEN877 45°有口邊
Brand BSEN877 45° Bend with Access Door



公稱直徑 Nominal Size DN (mm)	a (mm)
75	80
100	90
150	120
200	160
250	130

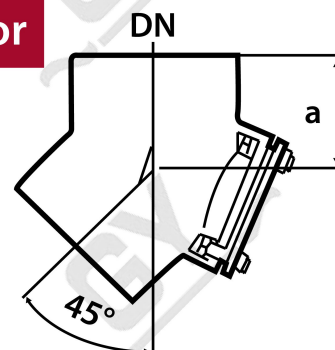


“G.Y.”

牌BSEN877 88°有口邊

Brand BSEN877 88° Bend with Access Door



公稱直徑	Nominal Size DN (mm)	a (mm)
50		75
75		102
100		112
150		150
200		175
250		220

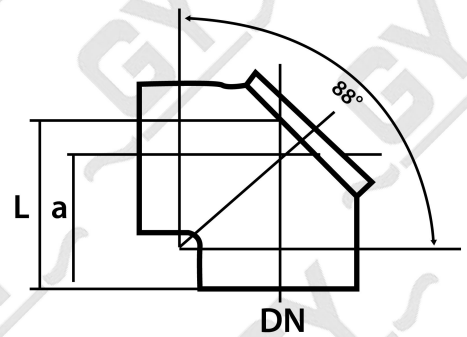


“G.Y.”

牌BSEN877 88°企頭邊

Brand BSEN877 88° Bend with Hell Opening



公稱直徑 Nominal Size DN		a	b
DN1	DN2	(mm)	
100	50	110	204

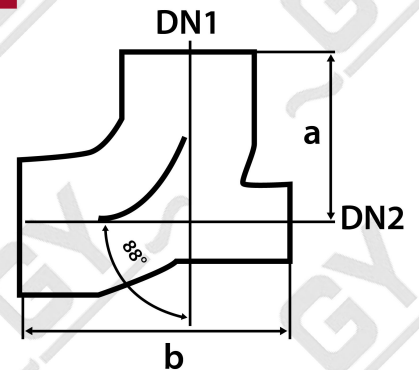


“G.Y.”

牌BSEN877 88°預仔邊

Brand BSEN877 88° Vent Bend




公稱直徑 Nominal Size DN		a	b
DN1	DN2	(mm)	
100	50	168	50

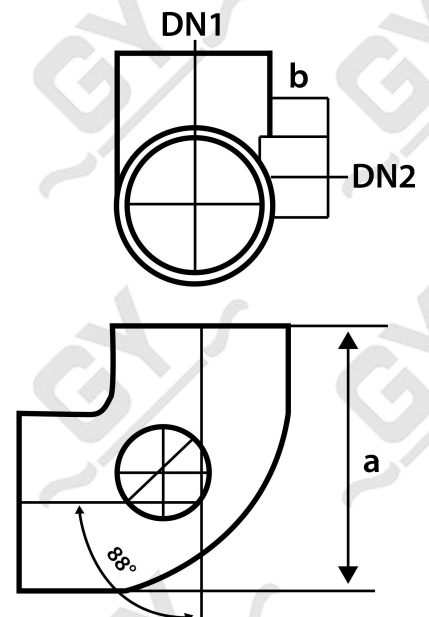

G.Y.

牌BSEN877 無口大彎邊
Brand BSEN877 Large Radius Bend


公稱直徑 Nominal Size DN (mm)	a	R
	(mm)	
75	275	250
100	340	300
	480	400
	650	600
150	350	300
	650	600
200	350	300
	655	600
250	655	600

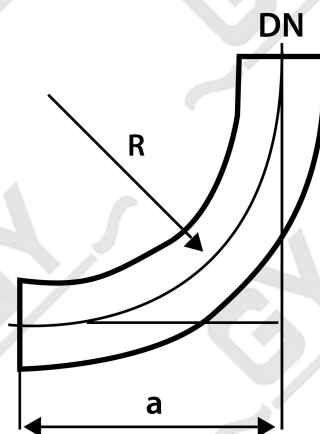

G.Y.

牌BSEN877 有口大彎邊
Brand BSEN877 Long Radius Bend with Access Door


公稱直徑 Nominal Size DN (mm)	a	R
	(mm)	
75	288	250
100	330	300
150	390	350

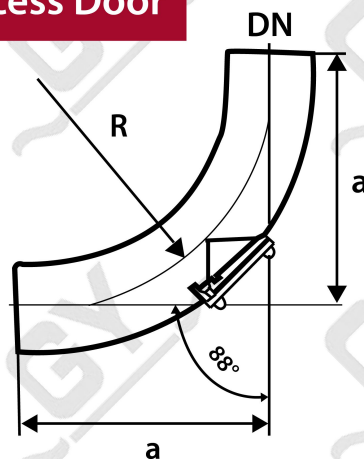

G.Y.

牌BSEN877 45°有口斜上叉
Brand BSEN877 45° Single Branch with Access Door


公稱直徑 Nominal Size DN (mm)	DN1	DN2	L	a	b
	(mm)				
100 x 75	100	75	235	184	184
100 x 100	100	100	280	205	205
150 x 100	150	100	300	240	240
150 x 150	150	150	370	275	275

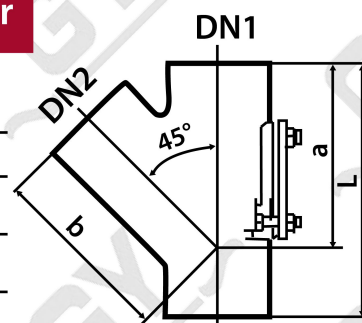

“G.Y.”

牌BSEN877 45°無口斜上叉
Brand BSEN877 45° Single Branch


公稱直徑 Nominal Size DN (mm)	DN1	DN2	L	a	b
50 x 50	50	50	160	136	136
75 x 50	75	50	190	140	140
75 x 75	75	75	225	160	160
100 x 50	100	50	204	167	167
100 x 75	100	75	230	175	175
100 x 100	100	100	280	205	205
150 x 75	150	75	255	215	215
150 x 100	150	100	300	240	240
150 x 150	150	150	358	265	265
200 x 100	200	100	307	267	267
200 x 150	200	150	375	300	300
200 x 200	200	200	460	343	343
250 x 150	250	150	405	350	350
250 x 250	250	250	560	430	430
300 x 150	300	150	425	380	380
300 x 300	300	300	655	494	494

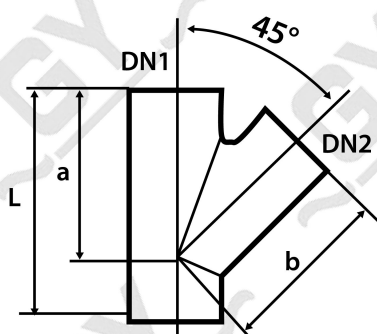

“G.Y.”


牌BSEN877 88°有口三叉
Brand BSEN877 88° Tee with Access Door

公稱直徑 Nominal Size DN (mm)	DN1	DN2	L	a	b
50 x 50	50	50	180	85	80
75 x 75	75	75	200	90	100
100 x 50	100	50	205	105	96
100 x 100	100	100	276	102	150
150 x 100	150	100	280	135	145
150 x 150	150	150	330	150	160
200 x 150	200	150	365	160	190



“G.Y.”


牌BSEN877 88°無口三叉
Brand BSEN877 88° Tee

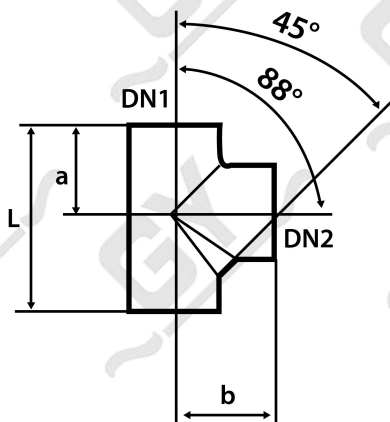

公稱直徑 Nominal Size DN (mm)	DN1	DN2	L	a	b
50 x 50	50	50	145	66	80
75 x 50	75	50	183	85	90
75 x 75	75	75	180	85	95
100 x 50	100	50	174	76	105
100 x 75	100	75	190	90	110
100 x 100	100	100	224	105	115
150 x 50	150	50	200	100	140
150 x 75	150	75	215	100	140
150 x 100	150	100	248	115	145
150 x 150	150	150	303	145	158
200 x 100	200	100	271	129	175
200 x 150	200	150	327	152	185
200 x 200	200	200	379	184	202
250 x 150	250	150	360	170	228
250 x 200	250	200	410	199	235
250 x 250	250	250	472	225	245
300 x 150	300	150	404	190	258
300 x 250	300	250	520	252	280
300 x 300	300	300	535	268	268

“G.Y.”

牌BSEN877 刁士
Brand BSEN877 Reducer




公稱直徑 Nominal Size DN (mm)		
DN1	DN2	L (mm)
75	50	83
100	50	80
100	75	92
150	75	102
150	100	107
200	100	115
200	150	125
250	150	140
250	200	145
300	150	150
300	200	160
300	250	170

“G.Y.”

牌BSEN877 45°雙頭斜叉
Brand BSEN877 45°Double Branch



公稱直徑 Nominal Size DN (mm)	DN1	DN2	L	a	b
100 x 50	100	50			
100 x 100	100	100			
150 x 100	150	100			

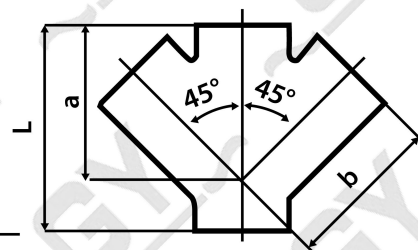


“G.Y.”

牌BSEN877 88°十字叉
Brand BSEN877 88° Double Branch




公稱直徑 Nominal Size DN (mm)	DN1	DN2	L	a	b
75	100	50	184	80	106
100	100	100	233	108	120
150	150	100	250	114	145

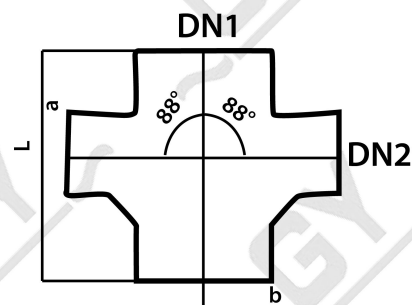

“G.Y.”

牌BSEN877 坭枳
Brand BSEN877 Cap




公稱直徑 Nominal Size DN (mm)	L (mm)
50	30
75	35
100	40
150	50
200	60
250	70
300	80

“G.Y.”

牌BSEN877 圓口短坭
Brand BSEN877 Short Pipe with Circular Access Door




公稱直徑 Nominal Size DN (mm)	L	a	b	H
75	224	77	137	110
100	263	104	159	130
150	324	150	210	165

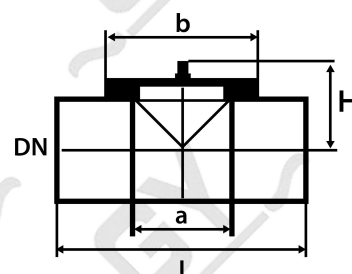


“G.Y.”

牌BSEN877方口短坭

Brand BSEN877 Short Pipe with Rectangular Access Door

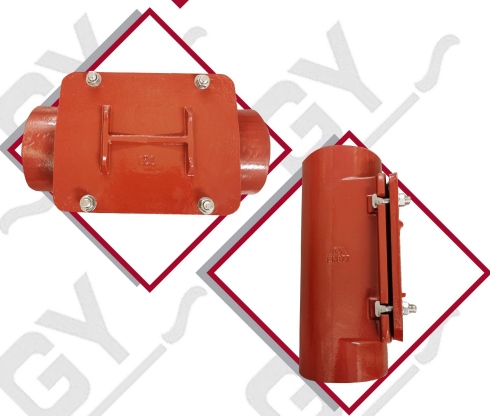

公稱直徑 Nominal Size DN (mm)	L	a	b	H
	(mm)			
100	340	200	230	60
150	395	250	280	85
200	465	300	330	110
250	570	350	426	150
300	640	400	476	168

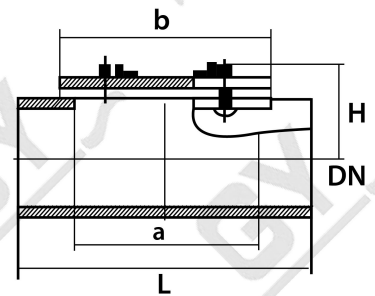


“G.Y.”

牌BSEN877圓無腊線菊花地台梳冷斗

BSEN877 Floor Drain with Circular Dome Grating & Hopper

公稱直徑 Nominal Size DN (mm)	呎吋	Dimensions		Unit: mm
	A	B	E	F
50	50	130	68	145
65	65	130	68	145
75	75	130	68	145
100	100	154	71	168
150	150	245	128	175

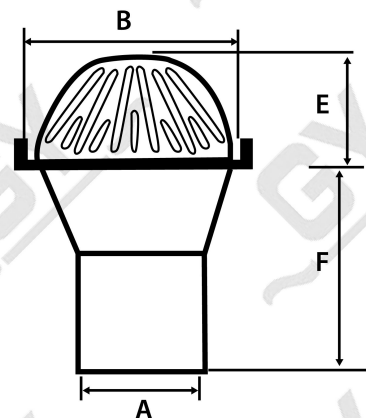


* “B”位菊花頭可改用SS304 / 316 不銹鋼菊花頭梳冷
“F”位尺寸可按客戶要求長度加長

“G.Y.”

BSEN877圓無腊線平面地台梳冷斗

Brand BSEN877 Floor Drain with Circular Flat Grating & Hopper

公稱直徑 Nominal Size DN (mm)	呎吋	Dimensions		Unit: mm
	A	B	E	F
50	50	130	8	145
65	65	130	8	145
75	75	130	8	145
100	100	154	10	168
150	150	245	12	175

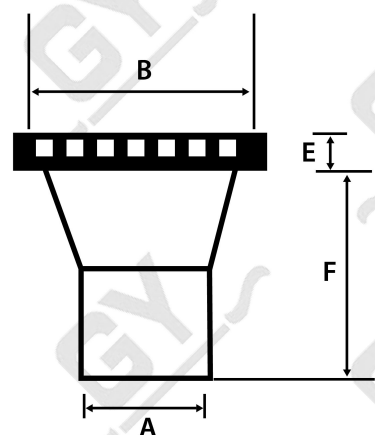

* “B”位圓平冷可改用SS304 / 316 不銹鋼圓平冷
“F”位尺寸可按客戶要求長度加長


“G.Y.”

牌BSEN877圓菊花腊線梳冷斗

Brand BSEN877 Circular Dome Grating & Seal Hopper



公稱直徑 Nominal Size DN (mm)	吋吋 Dimensions			Unit: mm	
	A	B	C	E	F
50	50	132	180	60	145
75	75	132	180	60	160
100	100	155	215	65	215
150	150	245	315	104	195
225	225	250	330	124	200
300	300	390	460	128	195

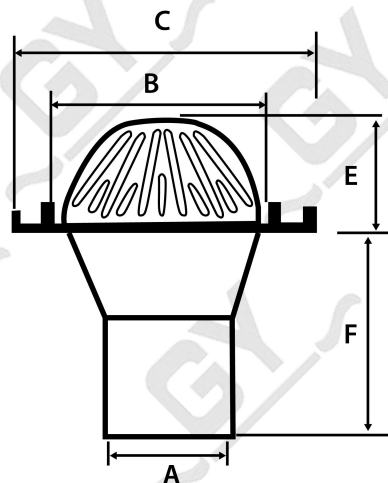

* “B”位菊花頭可改用SS304 / 316 不銹鋼菊花頭梳冷
“F”位尺寸可按客戶要求長度加長


“G.Y.”

牌BSEN877圓平面腊線梳冷斗

Brand BSEN877 Circular Flat Grating & Seal Hopper



公稱直徑 Nominal Size DN (mm)	吋吋 Dimensions			Unit: mm	
	A	B	C	E	F
50	50	132	180	8	145
75	75	132	180	6	160
100	100	155	215	10	215
150	150	245	315	14	195
225	225	250	330	12	200
300	300	390	460	14	195

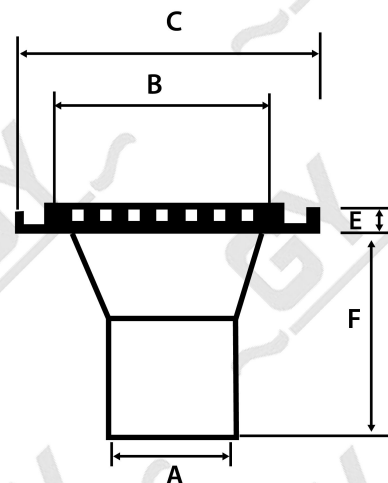


* “B”位圓平冷可改用SS304 / 316 不銹鋼冷
“F”位尺寸可按客戶要求長度加長

“G.Y.”

牌BSEN877圓天面腊線配內牙盤連銅電白叻外牙斗

Brand BSEN877 Water Outlet And Seal Hopper Fitted With Chrome Plated Brass Connector Holding A Stainless Steel Circular Grating

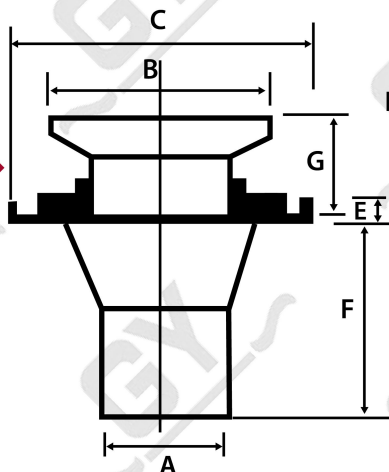


公稱直徑 Nominal Size DN (mm)	吋吋 Dimensions			Unit: mm		
	A	B	C	E	F	G
75	75	150	180	6	150	50
100	100	150	215	10	208	50
150	150	228	310	12	177	48

“G.Y.”

牌BSEN877 腊線垃圾剷曲尺型水斗

Brand BSEN877 Roof Rain Water Outlet with Angle Grating

公稱直徑 Nominal Size DN (mm)	吋吋 Dimensions				Unit: mm	
	A	a	b	c	d	e
75	75	300	149	238	150	145
100	100	305	155	238	150	149
150	150	410	200	350	215	215
225	225	490	240	335	250	188
300	300	685	295	480	395	298

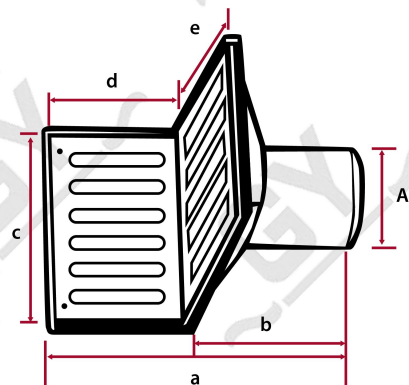


* 曲尺冷可改用SS304 / 316 不銹鋼曲尺冷
“b” 位尺寸可按客戶要求長度加長

“G.Y.”

牌BSEN877 腊線垃圾剷拱型水斗

Brand BSEN877 Roof Rain Water Outlet with Dome Grating

公稱直徑 Nominal Size DN (mm)	吋吋 Dimensions				Unit: mm	
	A	a	b	c	d	e
75	72	300	149	238	150	145
100	100	305	155	238	150	149
150	150	410	200	350	215	215
225	225	490	240	335	250	188
300	300	685	295	480	395	298

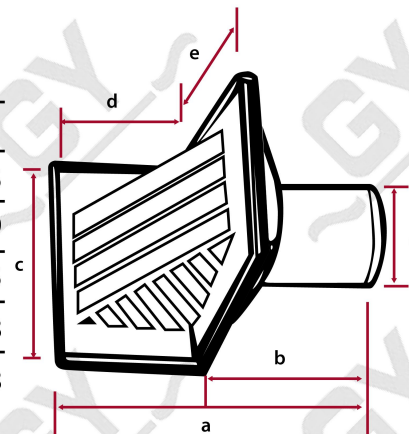


* 拱型冷可改用SS304 / 316 不銹鋼拱型冷
“b” 位尺寸可按客戶要求長度加長

“G.Y.”

牌BSEN877 $\phi 40\text{mm}$ 防咄力格氣

Brand BSEN877 $\phi 40\text{mm}$ Anti-Syphon“P”-trap


公稱直徑 Nominal Size DN (mm)	吋吋 Dimensions			Unit: mm	
	a	b	c	e	
40	245	136.5	48	110	

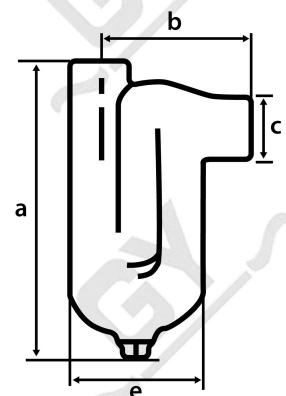

“G.Y.”


牌BSEN877 $\phi 50\text{mm}$ 防咄力格氣
Brand BSEN877 $\phi 50\text{mm}$ Anti-Syphon“P”-trap

公稱直徑 Nominal Size DN (mm)	呎吋 Dimensions		Unit: mm
	a	d	f
50	264	205	164

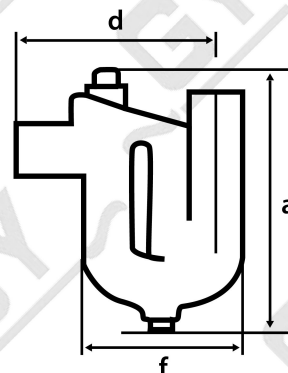


“G.Y.”

牌BSEN877 防咄力格氣
Brand BSEN877 Anti-Syphon“P”-trap

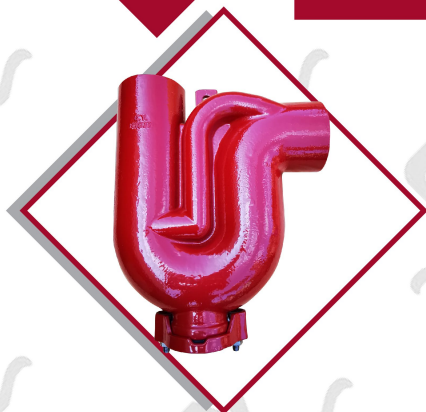



公稱直徑 Nominal Size DN (mm)	L (mm)	H (mm)
50	155	258
75	196	305
100	272	387

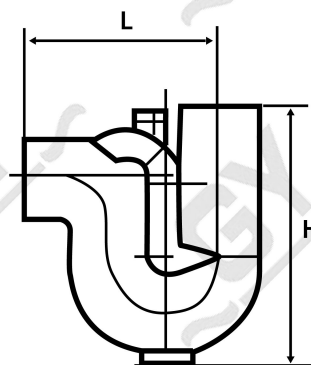

“G.Y.”

牌BSEN877 撞風頭 (連內不銹鋼片)
Brand BSEN877 Fresh Air-Inlet (Stainless Steel Flap Valve)

公稱直徑 Nominal Size DN (mm)	呎吋 Dimensions					Unit: mm
	A	a	b	c	d	e
75	72	213	128	108	90	128
100	100	210	122	110	90	125
160	150	295	190	170	105	185



“G.Y.”牌SS304/ SS316不銹鋼喉箍

“G.Y.”Brand Stainless Steel Coupling
SS304/ SS316



牌不銹鋼B型喉箍
Brand Stainless Steel Coupling (Type-B)




公稱直徑 Nominal Size DN (mm)	L (mm)
50	41
75	45
100	45
150	54
200	66





牌不銹鋼CHA型喉箍
Brand Stainless Steel Coupling (Type-CHA)



公稱直徑 Nominal Size DN (mm)	L (mm)	螺孔數量 Number of Bolts (mm)
250	140	8
300	140	8



加強爪箍

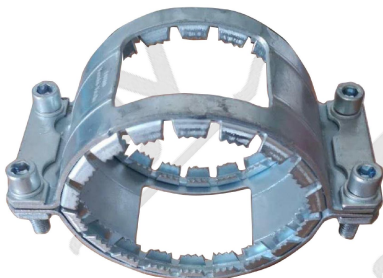



牌B型耳板式喉箍(紅坭生鐵/球鐵)
Brand Type B-Ear Plate Coupling for (CI/DI)




牌B型喉箍(紅坭生鐵/鑄鐵)
Brand Special Type-B Coupling for
(EN877/BS437,BS4622)



牌D型喉箍(變徑型喉箍)
Brand Type D Coupling



牌不銹鋼包膠喉碼(固定支架)
Brand Stainless Steel Bracket





Tel: 2473 2996

Fax: 2473 2887

Email: info@gymetal.com.hk

Website:
www.gymetal.com.hk



香港新界元朗青山道43號
誠信商業大廈9樓全層

9/F, Shing Shun Building, No.43,
Castle Peak Road, Yuen Long,
N.T. Hong Kong



俊業五金鑄造有限公司
Gent-Year Metal Foundry Limited

版權所有 · 翻印必究 All Rights Reserved