

"G.Y."牌鑄鐵配件系列

"G.Y." Brand Cast Iron Fittings



俊業五金鑄造有限公司

Gent-Year Metal Foundry Limited

「公司簡介」 Introduction

本公司是經銷水喉、渠務及建築行業使用的生鐵、球鐵產品的專業公司，其創立的品牌"G.Y."牌各類產品確保質量，避免與其他牌子混淆。主要產品有符合BS416、BS437、BS1211、BS4622和EN877標準的(規格Ø50mm至Ø700mm)鑄管及配件；符合BS497/EN124標準的沙井蓋板及明渠梳冷，還有符合BS4772/EN545的球鐵配件以及可按客戶的要求或來圖生產特殊的非標準產品及不銹鋼精鑄產品等。

本公司在廣東省中山市自設佔地7,000M²的鑄造工廠，該廠擁有經驗豐富的優秀技術管理人員及工人，現代化設備廠房，用先進的技術生產符合客戶要求的高質產品。

為保障客戶的急需，本公司在新界元朗設有佔地4,000M²的倉庫，儲存足夠應付日常需求的各類產品，保證及時送貨到地盤。

多年來，隨着產品質量及服務質素的不斷提高，"G.Y."牌產品獲得本港多間大型發展商、承建商及政府有關部門青睞。本着精益求精的精神，並參考客戶反饋的意見，繼續對產品進行改進，力求做到更好。

本公司一貫秉承"品種齊備，品質第一，送貨及時"的宗旨，為廣大用戶提供優質的產品及服務。

Gent-Year Metal Foundry Ltd.

Our company specializes in manufacturing and supplying of high quality pumping, drainage, cast-iron and ductile iron products for various drainage and construction projects. Our "G.Y." brand provides a variety of products with high quality and is easily distinguished from the others. The main products include Cast Iron Pipes and Fittings which comply with the BS416, BS437, BS1211, BS4622 and EN877 standards (Ø50mm - Ø700mm), Manhole Covers, Frames and Channel Gratings which meet BS497/EN124 standards and the BS4772/EN545 Ductile Iron Fittings. We also produce tailor-made products, including stainless steel products, in accordance with client's specifications or drawings.

We have a 7,000 sq.m. foundry in ZhongShan, Guangdong, China for manufacturing high quality products. Being run by the excellent technicians and administrative staff, the foundry fully makes use of the latest facilities and techniques in production process to meet all clients' requirements.

To address the urgent needs of our clients, we have also set up a 4,000 sq.m. storage site in Yuen Long, N.T., Hong Kong with sufficient high quality stock ready for timely delivery to any sites in Hong Kong.

Over the years, with the continuous improvement in the quality of products and services, our "G.Y." products have been well recognized and adopted by many large developers/contractors and government departments in Hong Kong. Following the spirit of striving for the best and the valuable clients' feedback, we are trying harder to enhance our products and services to the best.

Our principle is to provide the clients with variety of products, excellent quality and timely delivery. We will endeavor to make you experience our excellent products and services in the industry.



CERTIFICATE

NUTEK SYSTEMS, LTD.
TEST REPORT

TITLE: Testing of Pipe Fitting

OUR REFERENCE: J5367B

DESCRIPTION OF SAMPLE: 300mm x 150mm Cast Iron Disconnecting P Trap

SAMPLE SUBMITTED BY: Gent-Year Metal Foundry Ltd.
Room 901, 9/F, Shing Shun Building,
No.43, Castle Peak Road, Yuen Long,
N.T., Hong Kong

BRAND: G.Y.

BODY MARKINGS: G.Y.

METHOD OF TEST: BS437: 1978

PERIOD OF TESTS: 23rd to 27th August 1999

RESULTS:

1. DIMENSIONS (in millimetres (BS437 Figure 1))

Sample	BS Requirement
Pipe	
Maximum bore	298
External diameter, max.	325
Thickness	12.5
Socket	
Minimum bore	190
Upper thickness H, min.	23
Lower thickness HL, min.	14
Internal depth	90 min.
External diameter	240

2. HYDROSTATIC PRESSURE TEST

Sample	Test pressure (kPa)	Duration (sec)	Remark
BS Requirement	170	15 - 60	Pass

3. SUMMARY OF RESULTS (apply only to the sample tested)

Dimensions - Satisfactory

Hydrostatic pressure test - Satisfactory

DATE: 28th August 1999 CERTIFIED BY: [Signature]
For E.A. Bruges
BSI P20 CEng FIMatE
FIMatE FIMatE MASIRAE
Director & General Manager

NUTEK SYSTEMS, LTD.
TEST REPORT

TITLE: Testing of Flange

OUR REFERENCE: J5010A

DESCRIPTION OF SAMPLE: 80mm Diameter x 550mm Long Cast Iron Puddle Flange

SAMPLE SUBMITTED BY: Gent-Year Metal Foundry Ltd.
Room 901, 9/F, Shing Shun Building,
No.43, Castle Peak Road, Yuen Long,
N.T., Hong Kong

BRAND: G.Y.

BODY MARKINGS: G.Y.

TEST REQUIRED: 1. BS4594: Section 3.2: 1989 PN16 Dimensions and
2. Hydraulic pressure test

PERIOD OF TESTS: 10th to 12th February 1999

RESULTS:

1. DIMENSIONS

Sample	BS Requirement
Nominal size (mm)	80
Face to face dimension (mm)	550
Body outside diameter, max. (mm)	106
Body internal diameter, min. (mm)	80
Diameter of middle flange (mm)	300
Thickness of middle flange (mm)	18.5
Outside diameter (mm)	200
Pitch circle diameter (mm)	160
Thickness, including raised face (mm)	22
Height of raised face (mm)	3
Bolt hole diameter (mm)	19
Number of bolt hole	8

2. HYDROSTATIC PRESSURE TEST

Sample	Test pressure (bar)	Duration (s)	Remark
BS Requirement	25	15	Pass

3. SUMMARY OF RESULTS (apply only to the sample tested)

Dimensions - Satisfactory

Hydrostatic pressure test - Satisfactory

DATE: 24th October 1998 CERTIFIED BY: [Signature]
For E.A. Bruges
BSI P20 CEng FIMatE
FIMatE FIMatE MASIRAE
Director & General Manager

NUTEK SYSTEMS, LTD.
TEST REPORT

TITLE: Testing of Pipe Fitting

OUR REFERENCE: NO. J5010A (P.2)

2. HYDRAULIC PRESSURE TEST

Sample	Test pressure (bar)	Duration (s)	Remark
BS Requirement	24	60	Pass

Note: no leakage was detected during the above test.

DATE: 13th February 1999 CERTIFIED BY: [Signature]
For E.A. Bruges
BSI P20 CEng FIMatE
FIMatE FIMatE MASIRAE
Director & General Manager

NUTEK SYSTEMS, LTD.
TEST REPORT

TITLE: Testing of Pipe Fitting

OUR REFERENCE: J4745A

DESCRIPTION OF SAMPLE: 3" x 90° Ductile Iron Flanged Bend

SAMPLE SUBMITTED BY: Gent-Year Metal Foundry Limited
Room 1001-2, 10/F, Shing Shun Building,
No.43, Castle Peak Road, Yuen Long,
N.T., Hong Kong

BRAND: G.Y.

BODY MARKINGS: G.Y.

METHOD OF TEST: BS4772: 1988

PERIOD OF TESTS: 12th to 16th October 1998

RESULTS:

1. DIMENSIONS

Sample	BS Requirement
Nominal size (mm)	80
Length (mm)	154
Body wall thickness, excluding cement a (mm)	7.0
Thickness of cement individual (mm)	2.5 min.
Thickness of cement arithmetic mean (mm)	3.6
Outside diameter (mm)	200
Pitch circle diameter (mm)	160
Thickness b (mm)	17.1
Bolt hole diameter (mm)	19
Number of bolt hole	8
Height of raised face (mm)	3

2. HYDROSTATIC PRESSURE TEST

Sample	Test pressure (kPa)	Duration (sec)	Remark
BS Requirement	170	60	Pass

3. SUMMARY OF RESULTS (apply only to the sample tested)

Dimensions - Satisfactory

Hydrostatic pressure test - Satisfactory

DATE: 24th October 1998 CERTIFIED BY: [Signature]
For E.A. Bruges
BSI P20 CEng FIMatE
FIMatE FIMatE MASIRAE
Director & General Manager

NUTEK SYSTEMS, LTD.
TEST REPORT

TITLE: Testing of Pipe Fitting

OUR REFERENCE: J7684C

DESCRIPTION OF SAMPLE: 100mm x R760 Cast iron large radius bend

SAMPLE SUBMITTED BY: Gent-Year Metal Foundry Limited
Room 1101, 11/F, Shing Shun Building,
No.43, Castle Peak Road, Yuen Long,
N.T., Hong Kong

BRAND: G.Y.

BODY MARKINGS: G.Y.

METHOD OF TEST: BS437: 1978

PERIOD OF TESTS: 25th to 29th December 2001

RESULTS:

1. DIMENSIONS (BS437 Figure 1 - in millimetres)

Sample	BS Requirement
Pipe	
Minimum bore	99
External diameter, max.	119
Thickness, min.	8.0
Socket	
Minimum bore	136
Upper thickness H	24.5
Lower thickness HL	14
Internal depth	185
External diameter	185 (nominal)

2. HYDROSTATIC PRESSURE TEST

Sample	Test pressure (kPa)	Duration (sec)	Remark
BS Requirement	170	60	Pass

3. SUMMARY OF RESULTS (apply only to the sample tested)

Dimensions - As shown in section 1

Hydrostatic pressure test - Satisfactory

DATE: 30th December 2001 CERTIFIED BY: [Signature]
For E.A. Bruges
BSI P20 CEng FIMatE
FIMatE FIMatE MASIRAE
Director & General Manager

NUTEK SYSTEMS, LTD.
TEST REPORT

TITLE: Testing of Pipe Fitting

OUR REFERENCE: J4745A

DESCRIPTION OF SAMPLE: 3" x 90° Ductile Iron Flanged Bend

SAMPLE SUBMITTED BY: Gent-Year Metal Foundry Limited
Room 1001-2, 10/F, Shing Shun Building,
No.43, Castle Peak Road, Yuen Long,
N.T., Hong Kong

BRAND: G.Y.

BODY MARKINGS: G.Y.

METHOD OF TEST: BS4772: 1988

PERIOD OF TESTS: 12th to 16th October 1998

RESULTS:

1. DIMENSIONS

Sample	BS Requirement
Nominal size (mm)	80
Length (mm)	154
Body wall thickness, excluding cement a (mm)	7.0
Thickness of cement individual (mm)	2.5 min.
Thickness of cement arithmetic mean (mm)	3.6
Outside diameter (mm)	200
Pitch circle diameter (mm)	160
Thickness b (mm)	17.1
Bolt hole diameter (mm)	19
Number of bolt hole	8
Height of raised face (mm)	3

2. HYDROSTATIC PRESSURE TEST

Sample	Test pressure (kPa)	Duration (sec)	Remark
BS Requirement	170	60	Pass

3. SUMMARY OF RESULTS (apply only to the sample tested)

Dimensions - Satisfactory

Hydrostatic pressure test - Satisfactory

DATE: 24th October 1998 CERTIFIED BY: [Signature]
For E.A. Bruges
BSI P20 CEng FIMatE
FIMatE FIMatE MASIRAE
Director & General Manager

NUTEK SYSTEMS, LTD.
TEST REPORT

TITLE: Testing of Pipe Fitting

OUR REFERENCE: J4745A

DESCRIPTION OF SAMPLE: 300mm Cast iron angle type water outlet with down galling

SAMPLE SUBMITTED BY: Gent-Year Metal Foundry Limited
Room 901, 9/F, Shing Shun Building,
No.43, Castle Peak Road, Yuen Long,
N.T., Hong Kong

BRAND: G.Y.

BODY MARKINGS: G.Y.

METHOD OF TEST: BS437: Part 1: 1980

PERIOD OF TESTS: 9th to 10th January 2000

RESULTS:

1. DIMENSIONS (in millimetres)

Sample	BS Requirement
Pipe	
Internal diameter, min.	298
External diameter, max.	325
Thickness	12.5

2. HYDRAULIC PRESSURE TEST

Sample	Test pressure (bar)	Duration (sec)	Remark
BS Requirement	0.5	15	Pass

3. SUMMARY OF RESULTS (apply only to the sample tested)

Dimensions - Satisfactory

Hydraulic pressure test - Satisfactory

DATE: 10th January 2000 CERTIFIED BY: [Signature]
For E.A. Bruges
BSI P20 CEng FIMatE
FIMatE FIMatE MASIRAE
Director & General Manager

NUTEK SYSTEMS, LTD.
TEST REPORT

TITLE: Testing of Surface Box

OUR REFERENCE: J5010A

DESCRIPTION OF SAMPLE: 12" x 12" Flange Cast Iron Cover with Flange, Heavy Duty

SAMPLE SUBMITTED BY: Gent-Year Metal Foundry Ltd.
Room 901, 9/F, Shing Shun Building,
No.43, Castle Peak Road, Yuen Long,
N.T., Hong Kong

BRAND: G.Y.

BODY MARKINGS: G.Y.

METHOD OF TEST: BS437: Part 1: 1980

PERIOD OF TESTS: 23rd to 27th January 1999

RESULTS:

1. DIMENSIONS

Sample	BS Requirement
Load applied (kN)	15
Duration (s)	60
Fracture after loading	No
Remark	Pass

2. HYDROSTATIC PRESSURE TEST

Sample	Test pressure (bar)	Duration (sec)	Remark
BS Requirement	0.5	15	Pass

3. SUMMARY OF RESULTS (apply only to the sample tested)

Dimensions - Satisfactory

Hydrostatic pressure test - Satisfactory

DATE: 27th January 1999 CERTIFIED BY: [Signature]
For E.A. Bruges
BSI P20 CEng FIMatE
FIMatE FIMatE MASIRAE
Director & General Manager

NUTEK SYSTEMS, LTD.
TEST REPORT

TITLE: Testing of Pipe Fitting

OUR REFERENCE: J5010A

DESCRIPTION OF SAMPLE: 120mm Cast iron Tee with down galling

SAMPLE SUBMITTED BY: Gent-Year Metal Foundry Limited
Room 901, 9/F, Shing Shun Building,
No.43, Castle Peak Road, Yuen Long,
N.T., Hong Kong

BRAND: G.Y.

BODY MARKINGS: G.Y.

METHOD OF TEST: BS437: Part 1: 1980

PERIOD OF TESTS: 14th to 17th June 1999

RESULTS:

1. DIMENSIONS (in millimetres)

Sample	BS Requirement
Pipe	
Internal diameter	225
External diameter	245
Thickness	7.0
Socket	
Internal diameter	200
Thickness	21.5
Internal depth	185
External diameter	215

2. HYDROSTATIC PRESSURE TEST

Sample	Test pressure (bar)	Duration (sec)	Remark
BS Requirement	0.5	15	Pass

3. SUMMARY OF RESULTS (apply only to the sample tested)

Dimensions - Satisfactory

Hydrostatic pressure test - Satisfactory

DATE: 22nd June 1999 CERTIFIED BY: [Signature]
For E.A. Bruges
BSI P20 CEng FIMatE
FIMatE FIMatE MASIRAE
Director & General Manager

NUTEK SYSTEMS, LTD.
TEST REPORT

TITLE: Testing of Pipe Fitting

OUR REFERENCE: J4745A

DESCRIPTION OF SAMPLE: 300mm Cast iron Tee with down galling

SAMPLE SUBMITTED BY: Gent-Year Metal Foundry Ltd.
Room 901, 9/F, Shing Shun Building,
No.43, Castle Peak Road, Yuen Long,
N.T., Hong Kong

BRAND: G.Y.

BODY MARKINGS: G.Y.

METHOD OF TEST: BS437: Part 1: 1980

PERIOD OF TESTS: 29th to 31st August 2000

RESULTS:

1. DIMENSIONS (in millimetres)

Sample	BS Requirement
Pipe	
Internal diameter, min.	298
External diameter, max.	325
Thickness	12.5
Socket	
Internal diameter	200
Thickness	21.5
Internal depth	185
External diameter	215

2. HYDRAULIC PRESSURE TEST

Sample	Test pressure (bar)	Duration (sec)	Remark
BS Requirement	0.5	15	Pass


3. SUMMARY OF RESULTS (apply only to the sample tested)

Dimensions - Satisfactory

Hydraulic pressure test - Satisfactory

DATE: 31st August 2000 CERTIFIED BY: [Signature]
For E.A. Bruges
BSI P20 CEng FIMatE
FIMatE FIMatE MASIRAE
Director & General Manager

生產及運輸過程 MANUFACTURING & DELIVERY PROCESS

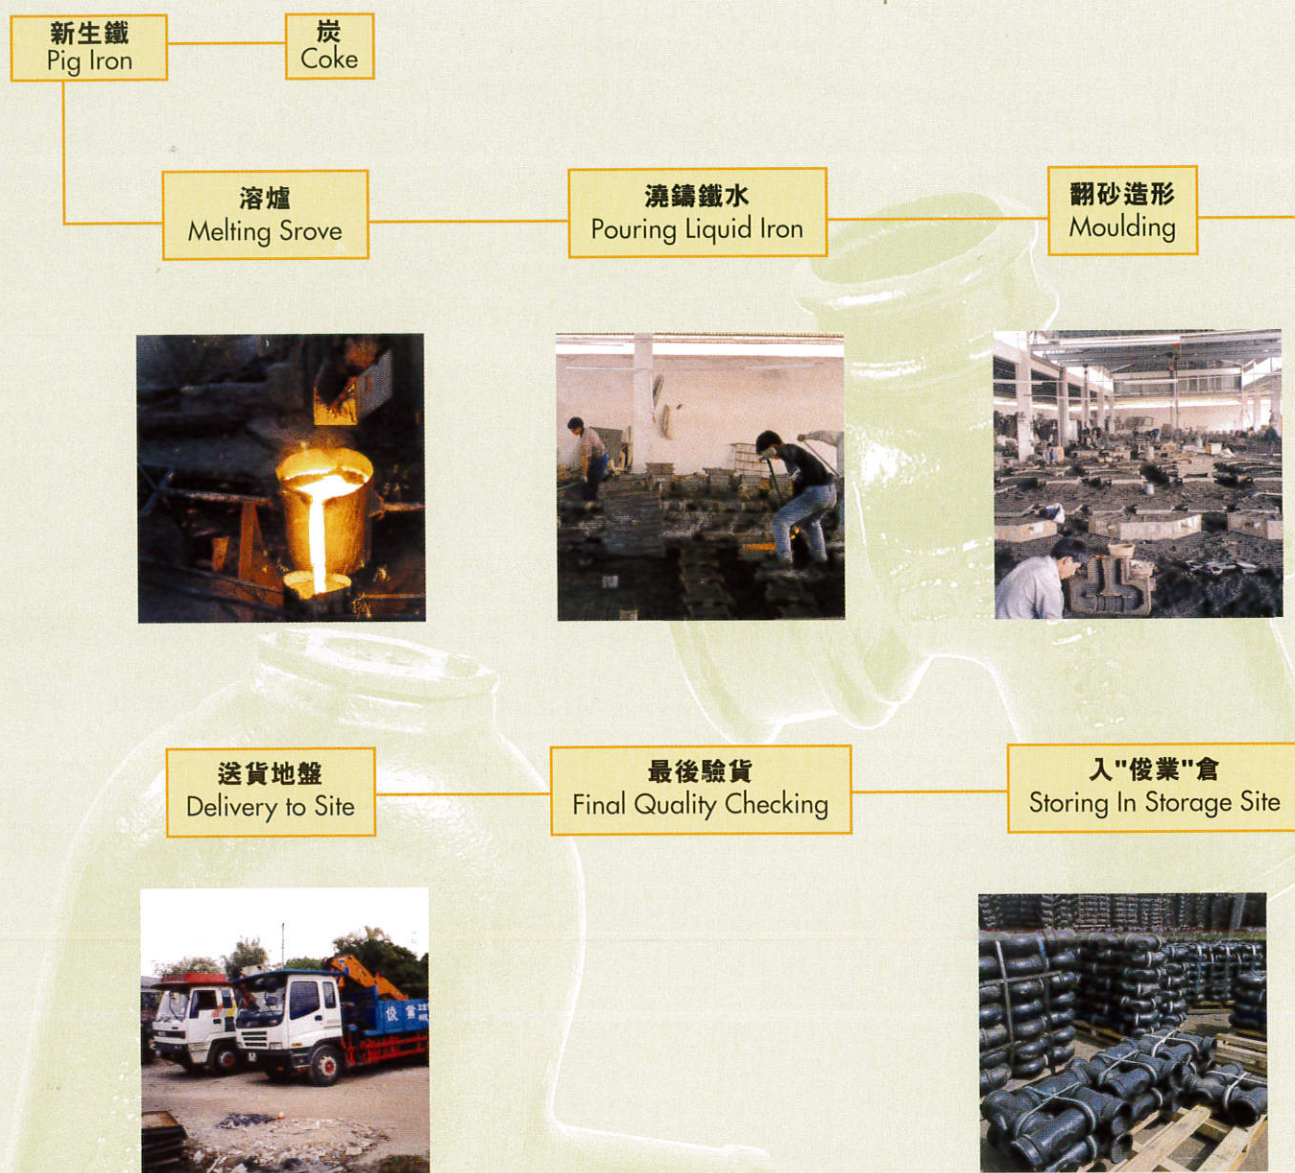

品質檢查系統

由於本公司的貨品均來自中國大陸，雖然已由工廠檢查過，但當貨品運到貨倉後，公司貨倉品質檢查員及公司負責人還會檢查來貨的品質，檢查工作包括下列各項：

1. 鑄件在鑄造方面有沒有缺陷，例如壁厚是否平均，有無砂孔及形狀是否有變等
2. 清砂及磨披鋒等工程序是否做妥
3. 檢查油漆質量及是否生銹
4. 重量及規格呎吋是否符合標準
5. 所有原材料的質量
6. 包裝方面是否穩固安全
7. 貨品有否破損及其程度

若發現品質有問題，即時拍下照片，將照片寄給工廠及將品質問題向工廠投訴，要求進一步改善。廢品絕不會交給客戶，確保為廣大用戶提供優質產品和一流的服務。

生產及運輸過程 MANUFACTURING & DELIVERY PROCESS

自然冷卻
Natural Cooling

驗貨
Quality Checking

清砂、打磨
Product Polishing

機械加工
Machine Finishing



到達香港
Arriving At HK

離開中國
Departing From China

驗貨
Quality Checking

塗瀝青油
Coating Of Bitumen



Quality Control System

Owing to our company's goods which were made from the Mainland China, we would double check the goods although inspections already performed by the Mainland China's factory. After the goods were delivered to our warehouse in Hong Kong, our quality control inspector and company in-charge would carry out the following inspections,

1. Any defect on casting such as continuity thickness, casting cavities and any deformation was checked.
2. The processes of removing sand from mold and grinding sharp edge were completed.
3. Good quality of paint was used and no rusting occurred.
4. Standard size and weight were followed.
5. The quality of material was checked.
6. The package of goods was rigid and safe.
7. Any damage and state of damage was recorded.


If any defect on quality occurred, we should take a photo immediately. Complaints with photo would sent to Mainland China's factory for requesting further improvement. Defective goods will absolutely not supply to any customer in order to ensure us to provide sound goods with high quality services.



俊業五金鑄造有限公司
Gent-Year Metal Foundry Limited

版權所有，翻印必究
All Rights Reserved
Tel : 2473 2996 Fax : 2473 2887


"G.Y." Brand BS416 Tee With Door "G.Y."牌 BS416 有口三叉



Specification 規格	Dimensions 呎吋									Unit: mm
	A	A1	a	b	c	d	d1	e	θ	
50 x 50	50	73	265	64	120	50	73	105	95°	
75 x 50	75	100	290	70	130	50	73	130	95°	
75 x 75	75	100	295	70	140	75	100	135	95°	
100 x 50	100	128	290	76	140	50	73	140	95°	
100 x 75	100	128	340	76	150	75	100	140	95°	
100 x 100	100	128	335	76	165	100	127	165	95°	
150 x 50	150	180	358	88	170	50	73	160	95°	
150 x 75	150	180	358	88	155	75	100	160	95°	
150 x 100	150	180	370	88	180	100	127	185	95°	
150 x 150	150	180	400	88	180	150	181	190	95°	




"G.Y." Brand BS416 45° Branch Tee With Door "G.Y."牌 BS416 有口斜上叉



Specification 規格	Dimensions 呎吋									Unit: mm
	A	A1	a	b	c	d	d1	e	θ	
75 x 50	75	100	280	70	175	50	73	190	45°	
75 x 75	75	100	320	70	220	75	100	220	45°	
100 x 50	100	127	330	76	160	50	76	200	45°	
100 x 75	100	127	320	76	220	75	100	220	45°	
100 x 100	100	127	350	76	275	100	127	260	45°	
150 x 75	150	181	360	88	260	75	100	270	45°	
150 x 100	150	181	390	88	270	100	127	270	45°	
150 x 150	150	181	470	88	330	150	181	310	45°	



"G.Y."牌 BS416 無口單吊叉



Specification 規格	Dimensions 呎吋									Unit: mm
	A	A1	a	b	c	d	d1	e	f	θ
100 x 50	100	127	330	76	135	50	73	146	278	95°




BS416生鐵配件

BS416 Cast Iron Fittings

(全部配不銹鋼螺絲)


"G.Y." Brand BS416 Horn Branch Tee "G.Y."牌 BS416 有口牛角叉



Specification 規格	Dimensions 呎吋						Unit: mm
	A	a	b	c	d	d1	
75 x 75 x 75	75	225	100	300	75	98	
100 x 100 x 100	100	222	95	342	100	127	
150 x 100 x 100	150	237	95	416	100	128	
150 x 150 x 150	150	278	115	500	150	180	




"G.Y." Brand BS416 Cross Tee With Door "G.Y."牌 BS416 有口十字叉



Specification 規格	Dimensions 呎吋								Unit: mm
	A	A1	a	b	c	d	d1	e	
75 x 50	75	100	180	70	110	50	73	120	
75 x 75	75	99	174	64	116	75	99	120	
100 x 50	100	127	190	76	140	50	73	130	
100 x 75	100	127	186	76	140	75	100	147	
100 x 100	100	127	170	76	155	100	127	160	
150 x 50	150	181	210	89	170	50	73	110	
150 x 100	150	180	200	89	170	100	127	180	



"G.Y." Brand BS416 95° Tee With Vent Socket (L/R) At The Junction "G.Y."牌 BS416 有口曲尺叉(可分左、右二種)

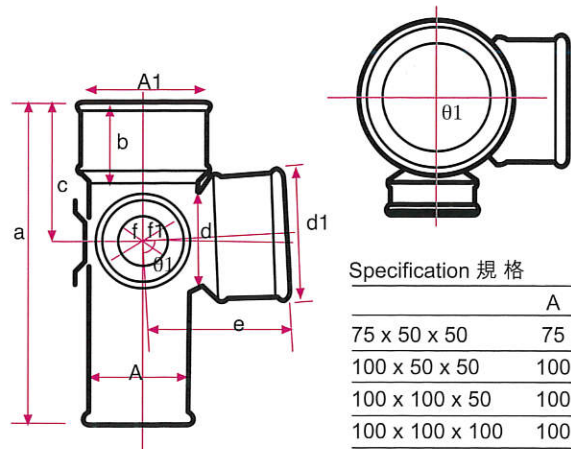

Specification 規格	Dimensions 呎吋											Unit: mm
	A	A1	a	b	c	d	d1	e	f	f1	θ	θ1
75 x 50 x 50	75	100	290	70	130	50	64	130	50	64	95°	90°
100 x 50 x 50	100	127	290	76	150	50	64	140	50	64	95°	90°
100 x 100 x 50	100	127	330	76	160	100	127	150	50	64	95°	90°
100 x 100 x 100	100	127	335	76	160	100	127	150	100	127	95°	90°
150 x 100 x 100	150	180	360	88	180	100	127	185	100	127	95°	90°


左曲尺叉



俊業五金鑄造有限公司
Gent-Year Metal Foundry Limited

版權所有，翻印必究
All Rights Reserved
Tel : 2473 2996 Fax : 2473 2887


"G.Y." Brand 95° BS416 Short Bend With Door
"G.Y."牌 BS416 95° 有口短邊

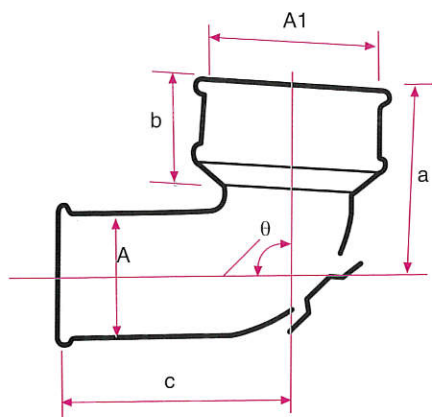

Specification 規格	Dimensions 呎吋						Unit: mm
	A	A1	a	b	c	θ	
50	50	73	120	64	110	95°	
75	75	100	120	70	130	95°	
100	100	127	145	76	165	95°	
150	150	181	190	89	195	95°	




"G.Y." Brand 45° BS416 Short Bend With Door
"G.Y."牌 BS416 45° 有口短邊

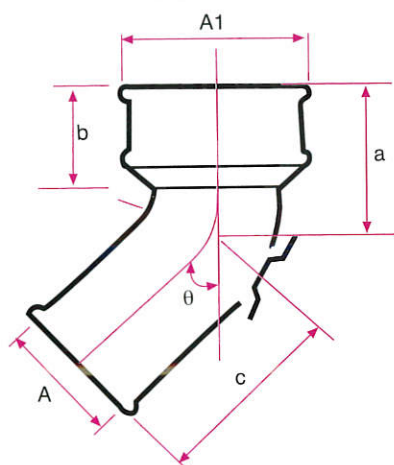


Specification 規格	Dimensions 呎吋						Unit: mm
	A	A1	a	b	c	θ	
50	50	73	120	64	110	45°	
75	75	100	120	70	115	45°	
100	100	127	135	76	130	45°	
150	150	181	165	89	140	45°	



"G.Y." Brand BS416 100 x 50mm Bend With Vent Horn
"G.Y."牌 BS416 100 x 50mm 有口企頭邊

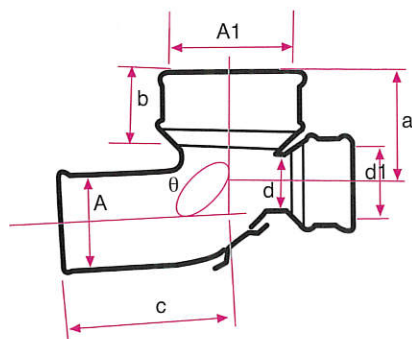

Specification 規格	Dimensions 呎吋								Unit: mm
	A	A1	a	b	c	d	d1	θ	
100 x 50	100	127	106	76	173	50	73	95°	

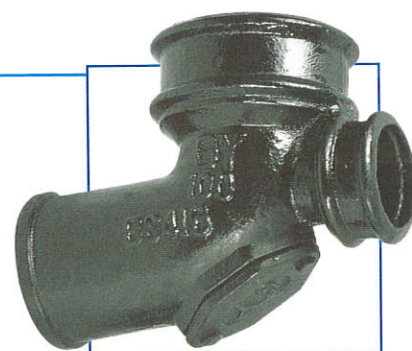



BS416生鐵配件

BS416 Cast Iron Fittings

(全部配不口鋼螺絲)

"G.Y." Brand BS416 100 x 50mm Bend With Door & Vent (L/R)

"G.Y."牌 BS416 100 x 50mm 有口左右預仔邊

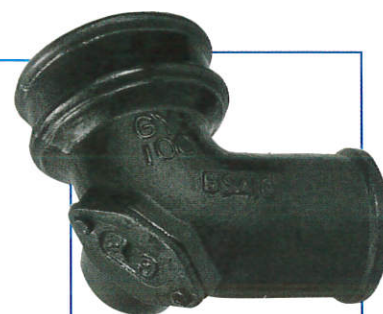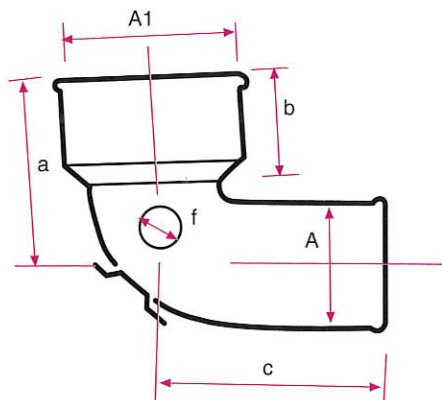


右預仔邊

Specification 規格	Dimensions 呎吋						Unit:mm
	A1	A	a	b	c	f	
100 x 50	127	100	140	76	175	50	

"G.Y." Brand BS416 Medium Radius Bend With Door


"G.Y."牌 BS416 有口中彎邊

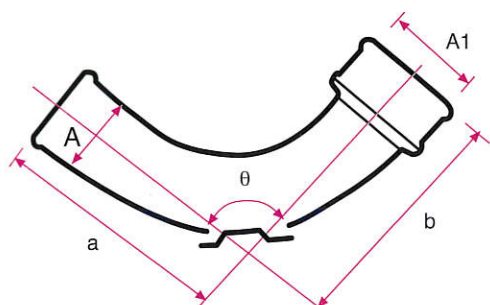

Specification 規格	Dimensions 呎吋					Unit: mm
	A	A1	a	b	θ	
75	75	100	100	200	95°	
100	100	127	225	210	95°	

"G.Y." Brand BS416 Long Radius Bend With Door

"G.Y."牌 BS416 有口大彎邊

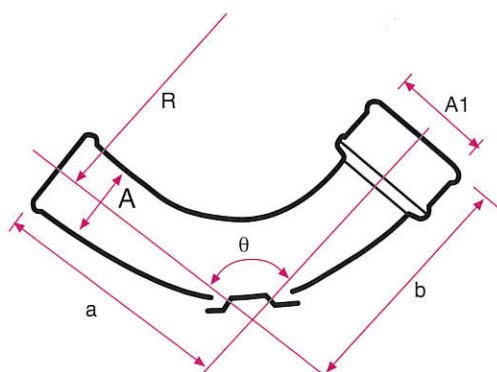


Specification 規格	Dimensions 呎吋					Unit: mm
	A	A1	a	b	θ	R
75	75	100	345	325	95°	300
100	100	128	370	360	95°	310
150	150	178	335	320	95°	350

BS416生鐵配件


BS416 Cast Iron Fittings

(全部配不銹鋼螺絲)


"G.Y." Brand BS416 C.I. Radius Bend With Door
"G.Y."牌 BS416 600R 有口大彎邊

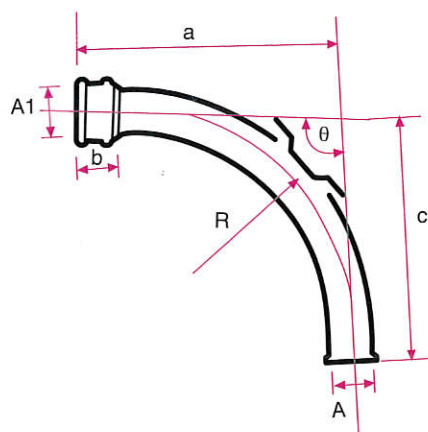

Specification 規格	Dimensions 呎吋						Unit: mm
	θ	A	A1	a	b	c	
100mm x 600R	95°	100	127	730	76	750	600
150mm x 600R	95°	150	178	730	88	750	600

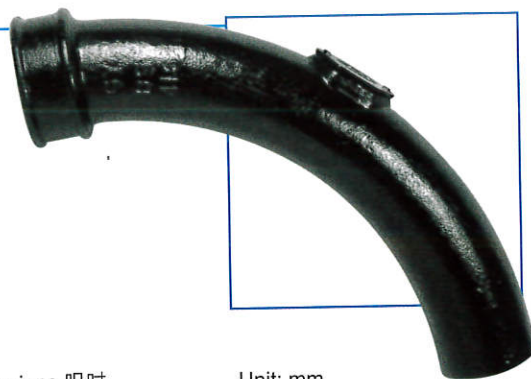


"G.Y." Brand BS416 Running Trap With Door
"G.Y."牌 BS416 有口牛押曲

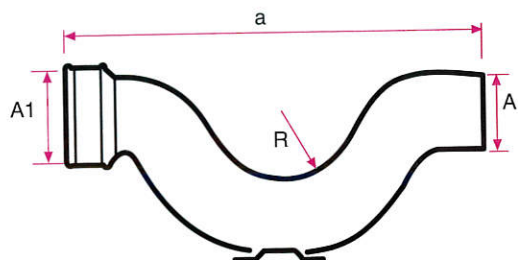

Specification 規格	Dimensions 呎吋					Unit: mm
	A	A1	a	b	R	
75	75	100	500	70	105	
100	100	128	590	76	90	
150	150	180	720	88	115	



"G.Y." Brand BS416 Socket
"G.Y."牌 BS416 梳杰

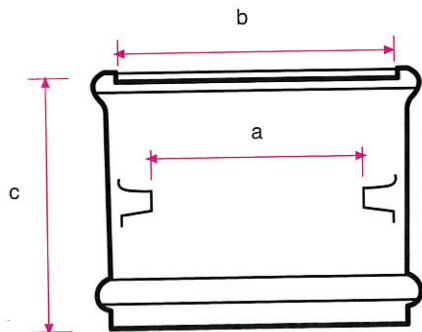

Specification 規格	Dimensions 呎吋			Unit: mm
	a	b	c	
50	50	73	88	
75	75	102	90	
100	100	127	110	
150	150	181	120	




BS416生鐵配件

BS416 Cast Iron Fittings

(全部配不銹鋼螺絲)

"G.Y." Brand BS416 100 x 50mm x 90° Vent Socket


"G.Y."牌 BS416 100 x 50mm x 90° 正咀梳杰

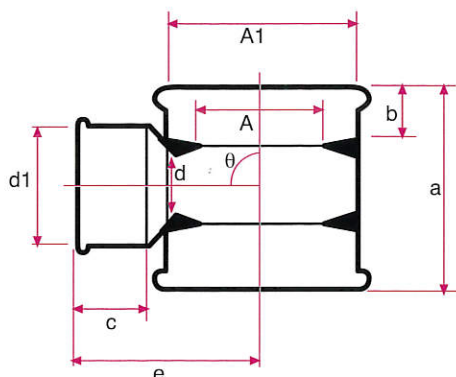

Specification 規格	Dimensions 呎吋									Unit: mm
	A	A1	a	b	c	d	d1	e	θ	
100 x 50 x 90°	100	127	127	38	40	50	76	110	90°	

"G.Y." Brand BS416 100 x 50mm x 60° Vent Socket


"G.Y."牌 BS416 100 x 50mm x 60° 斜咀梳杰

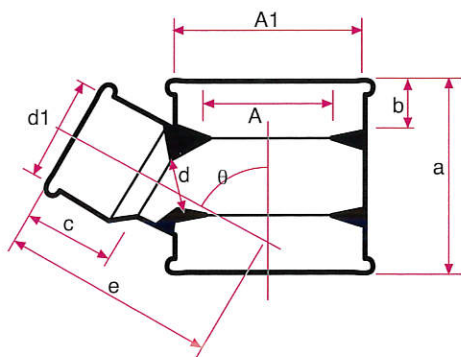

Specification 規格	Dimensions 呎吋									Unit: mm
	A	A1	a	b	c	d	d1	e	θ	
100 x 50 x 90°	100	127	127	38	40	50	76	132	60°	

"G.Y." Brand BS416 Short Pipes With Door

"G.Y."牌 BS416 有口短垆

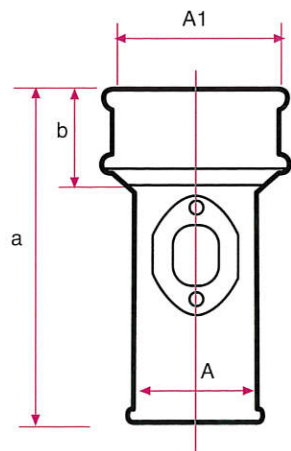


Specification 規格	Dimensions 呎吋				Unit: mm
	A	A1	a	b	
75	75	100	304	70	
100	100	127	320	76	
150	150	180	370	89	

BS416生鐵配件

BS416 Cast Iron Fittings

(全部配不銹鋼螺絲)


"G.Y." Brand BS416 Reducer "G.Y."牌 BS416 刁士

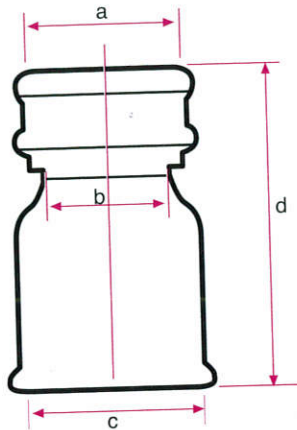

Specification 規格	Dimensions 呎吋				Unit: mm
	a	b	c	d	
75 x 50	73	50	75	153	
100 x 50	73	50	100	190	
100 x 75	101	75	100	190	
150 x 100	127	100	150	215	
225 x 150	181	150	225	250	




"G.Y." Brand BS416 Non-Concentric Reducer "G.Y."牌 BS416 側刁士

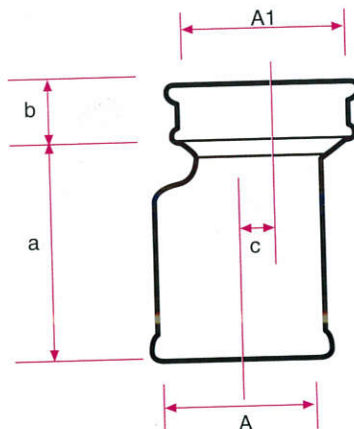

Specification 規格	Dimensions 呎吋					Unit: mm
	A	A1	a	b	c	
100 x 75	100	103	166	59	12	
150 x 75	150	100	175	62	37.5	
150 x 100	150	128	166	70	25	
225 x 150	225	180	220	80	38	



"G.Y." Brand BS416 Shoe "G.Y."牌 BS416 塌腳

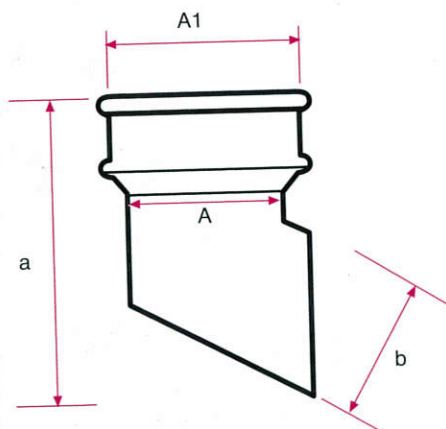

Specification 規格	Dimensions 呎吋				Unit: mm
	A	A1	a	b	
75	75	99	185	70	
100	100	127	237	76	
150	150	188	310	88	
225	225	275	440	100	
300	300	362	570	110	




BS416生鐵配件

BS416 Cast Iron Fittings

(全部配不銹鋼螺絲)

"G.Y." Brand BS416 Fresh Air-Inlet


"G.Y."牌 BS416 撞風頭

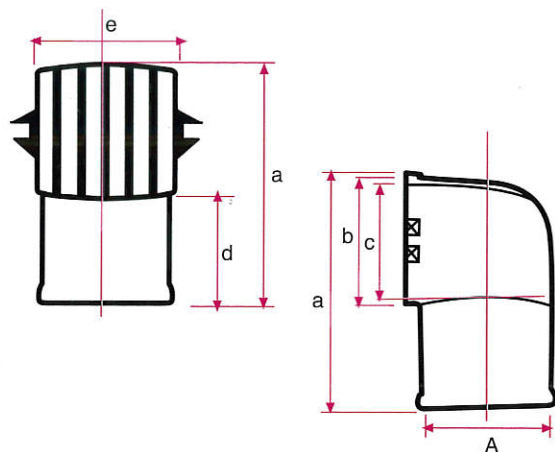

Specification 規格	Dimensions 呎吋					Unit: mm
	A	a	b	c	d	
75	72	178	105	90	74	108
100	100	205	115	95	83	130
150	150	294	190	172	100	185

"G.Y." Brand BS416 Lower "P" Trap



"G.Y."牌 BS416 無口淺水 "P"格氣

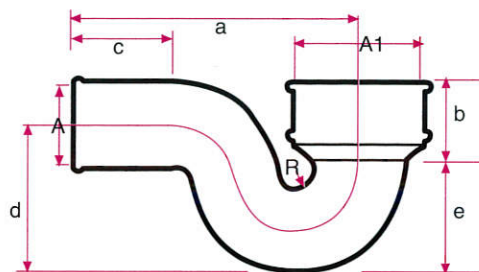

Specification 規格	Dimensions 呎吋						Unit: mm
	A	A1	a	b	c	d	
50	50	75	190	60	90	90	85
75	76	100	255	60	90	120	110
100	99	128	300	68	100	165	150
150	150	174	370	82	100	285	210

"G.Y." Brand BS416 Deep "P" Trap With Door

"G.Y."牌 BS416 有口深水 "P"格氣

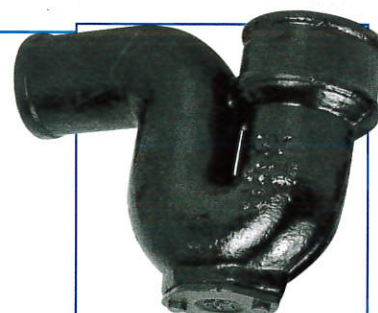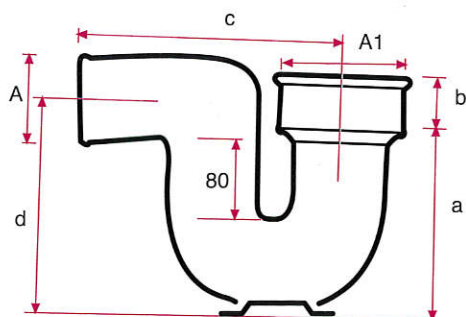


Specification 規格	Dimensions 呎吋					Unit: mm
	A	A1	a	b	c	
50	50	73	197	64	220	160
75	75	104	230	65	255	190
100	100	127	285	76	275	255
150	150	180	350	88	365	294

BS416生鐵配件

BS416 Cast Iron Fittings

(全部配不銹鋼螺絲)


"G.Y." Brand BS416 40mm Anti-Syphon "P" Trap
"G.Y."牌 BS416 1.5"防啞力格氣

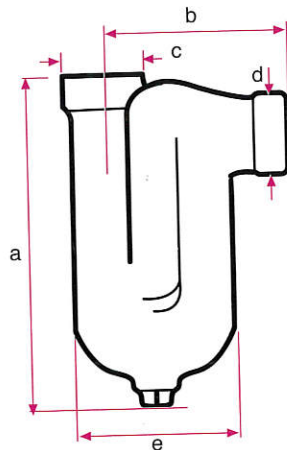


Specification 規格	Dimensions 呎吋					Unit: mm
	a	b	c	d	e	
40	245	136.5	61	61	121	




"G.Y." Brand BS416 50mm Anti-Syphon "P" Trap
"G.Y."牌 BS416 2"防啞力格氣

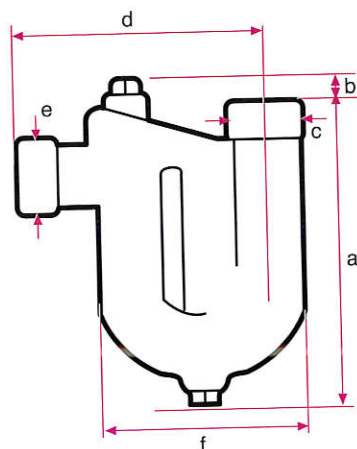


Specification 規格	Dimensions 呎吋						Unit: mm
	a	b	c	d	e	f	
50	272.3	23.3	68.5	210	68.7	172.1	

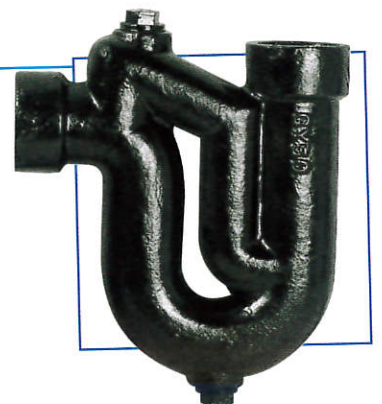

"G.Y." Brand BS416 Anti-syphon "P" Trap With Door
"G.Y."牌 BS416 有口"P"型防啞力格氣

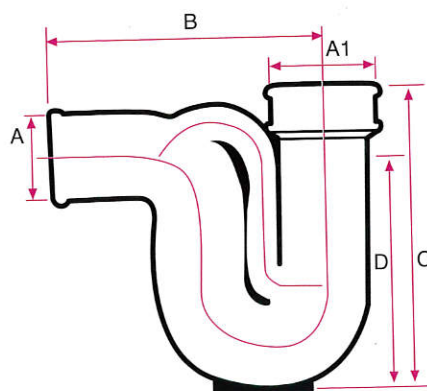

Specification 規格	Dimensions 呎吋					Unit: mm
	A	A1	B	C	D	
75	75	100	288	335	253	
100	100	127	330	370	270	
150	150	181	440	525	390	
200	200	246	510	657	495	
225	225	276	585	752	532	
300	300	350	775	960	725	

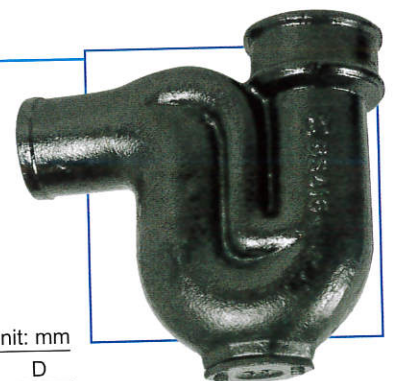


BS416生鐵配件

BS416 Cast Iron Fittings

(全部配不銹鋼螺絲)


"G.Y." Brand BS416 Cap With Door "G.Y."牌 BS416 坭枳

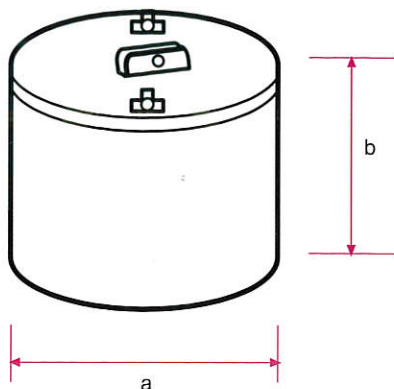


Specification 規格	Dimensions 呎吋		Unit: mm
	a	b	
75	83	50	
100	105	87	
150	151	75	
225	235	100	




"G.Y." Brand Grating Cover Or Gully Cover & With Hinges "G.Y."牌 有較梳勿渠蓋

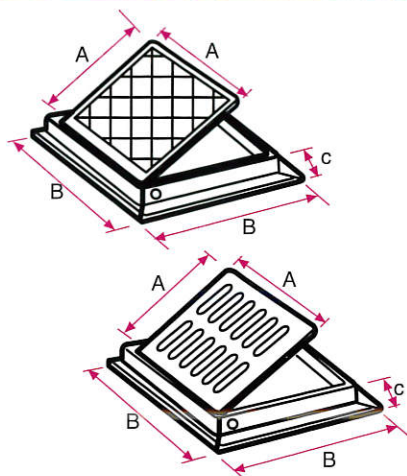


Specification 規格	Dimensions 呎吋			Unit: mm
	A	B	C	
150 輕身	152	200	30	6
200 輕身	200	250	30	6
225 輕身	225	280	35	7
300 輕身	300	360	40	8
450 輕身	450	550	50	21
150 重身	150	230	42	15
200 重身	200	260	38	8
225 重身	225	280	45	9
300 重身	300	360	50	10

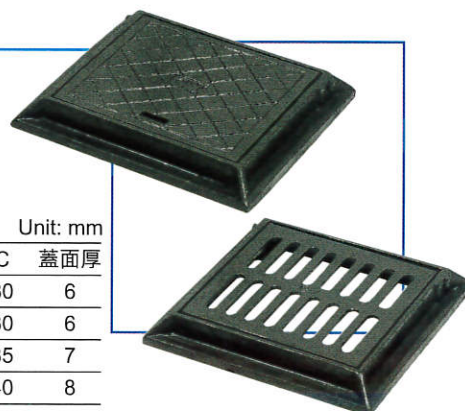


"G.Y." Brand C.I. Double Sealed Cover And Frame "G.Y."牌 雙子口螺絲密面

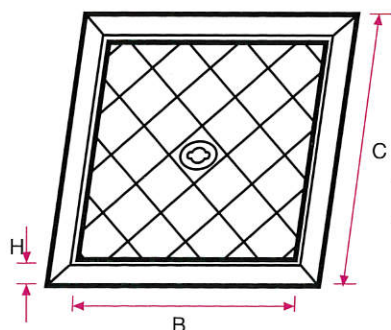


Specification 規格	Dimensions 呎吋			Unit: mm
	內孔	B	C	
150	115	175	215	25
200	150	210	250	25
300	225	305	355	40
420	300	420	485	40

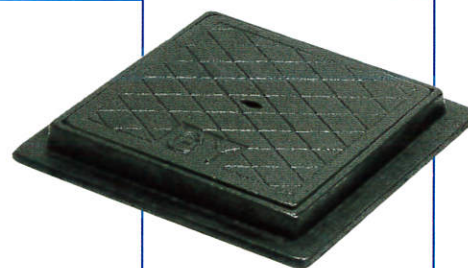


"G.Y." Brand Square Grating
"G.Y."牌 方渠什

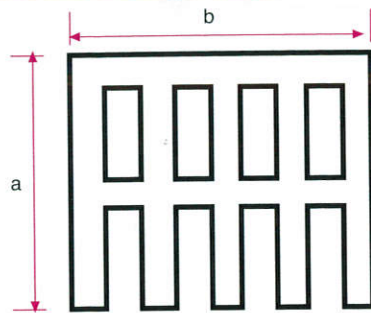

Specification 規格	Dimensions 呎吋		Unit: mm 厚度Thick
	a	b	
75	75	75	4
100	100	100	4
125	125	125	4
150	150	125	5
200	200	200	5
225	225	225	7
300	300	300	7.5

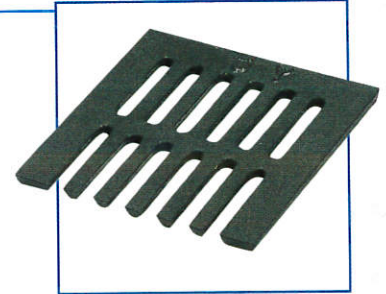


"G.Y." Brand Circular Grating
"G.Y."牌 圓渠冷



Specification 規格	Dimensions 呎吋	Unit:mm
	D	Thick
75	75	4
100	100	5
125	125	5
150	150	5
200	200	5
225	225	5
300	300	8



"G.Y." Brand Roof Rain Water Outlet With Angle Grating
"G.Y."牌 垃圾劇曲尺型水斗

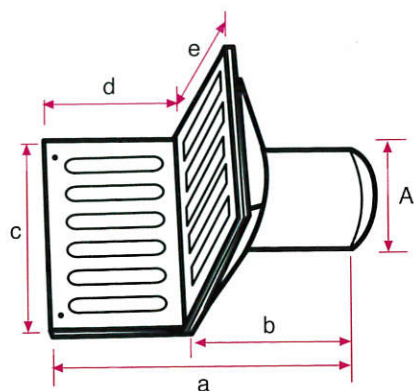

Specification 規格	Dimensions 呎吋					Unit: mm
	A	a	b	c	d	
75	75	320	170	245	140	140
100	100	320	170	245	140	140
150	150	490	240	335	250	187
225	225	490	240	335	250	188
300	300	685	295	480	395	298




BS416生鐵配件

BS416 Cast Iron Fittings



(全部配不銹鋼螺絲)

"G.Y." Brand Roof Rain Water Outlet With Dome Grating "G.Y."牌 垃圾剷拱型水斗

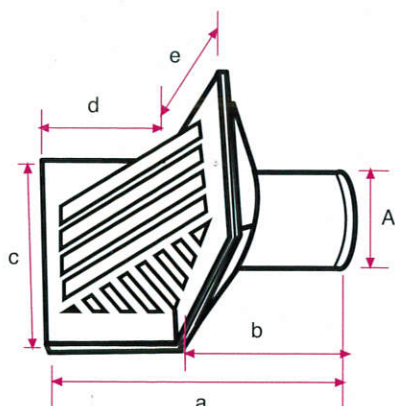

Specification 規格	Dimensions 呎吋						Unit: mm
	A	a	b	c	d	e	
75	75	320	170	245	140	140	
100	100	320	170	245	140	140	
150	150	490	240	335	250	187	
225	225	490	240	335	250	188	
300	300	685	295	480	395	298	


"G.Y." Brand Angle Type And Seal Water Outlet With Angle Grating "G.Y."牌 鋸線垃圾剷曲尺型水斗

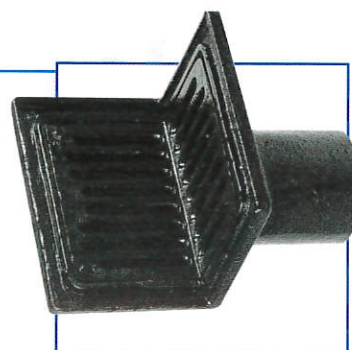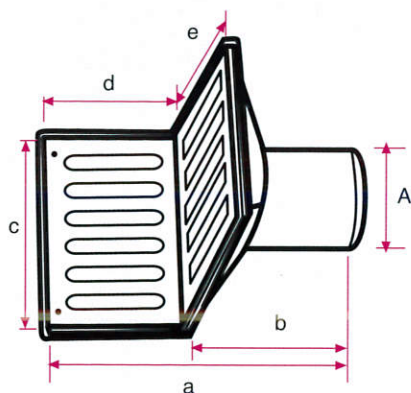

Specification 規格	Dimensions 呎吋						Unit: mm
	A	a	b	c	d	e	
75	75	300	150	235	150	150	
100	100	300	150	235	150	150	
150 (b位可加長)	150	428	203	350	240	288	

* b位可加長表面曲尺冷可改用不銹鋼

"G.Y." Brand Angle Type And Seal Water Outlet With Dome Grating "G.Y."牌 鋸線垃圾剷拱型水斗

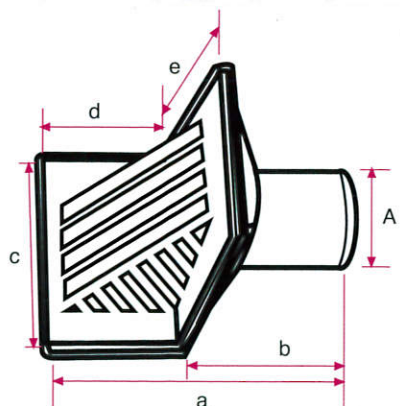


Specification 規格	Dimensions 呎吋						Unit: mm
	A	a	b	c	d	e	
75	75	300	150	235	150	150	
100	100	300	150	235	150	150	
150	150	428	203	350	240	288	

* b位可加長表面拱冷可改用不銹鋼

"G.Y." Brand Floor Drain With Circular Dome Grating & Hopper

"G.Y."牌 元無脂線菊花地台梳冷斗

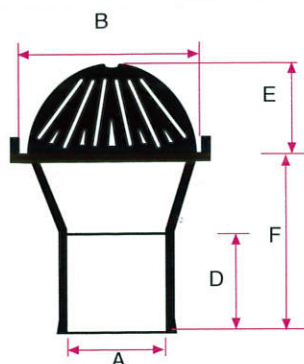


Specification 規格	Dimensions 呎吋					Unit: mm
	A	B	D	E	F	
50	50	130	70	68	145	
65	65	130	70	68	145	
75	75	130	70	68	145	
100	100	154	70	71	168	
150	150	250	70	126	175	
225						
300						

*菊花頭可改用不銹鋼，D 位尺吋可按客戶要求長度加長。



"G.Y." Brand Floor Drain With Circular Flat Grating & Hopper

"G.Y."牌 元無脂線平面地台梳冷斗




Specification 規格	Dimensions 呎吋					Unit: mm
	A	B	D	E	F	
50	50	130	70	8	145	
65	65	130	70	8	145	
75	75	130	70	6	145	
100	100	154	70	10	168	
150	150	250	70	12	175	
225						
300						

* B位平冷可改用不銹鋼，D 位尺吋可按客戶要求長度加長。



"G.Y." Brand Circular Dome Grating & Seal Hopper

"G.Y."牌 元菊花脂線梳冷斗

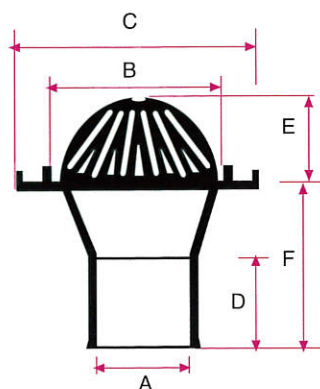

Specification 規格	Dimensions 呎吋						Unit: mm
	A	B	C	D	E	F	
50	50	130	178	55	68	135	
65	65	130	179	55	68	135	
75	75	130	180	90	67	150	
100	100	154	215	94	71	208	
150	150	250	315	90	126	177	
225	225	250	330	100	126	195	
300	300	390	468	100	128	195	

*菊花頭可改用不銹鋼，D位尺吋可按客戶要求長度加長




BS416生鐵配件

BS416 Cast Iron Fittings

(全部配不銹鋼螺絲)

"G.Y." Brand Circular Flat Grating & Seal Hopper "G.Y."牌 元平面脂線梳冷斗

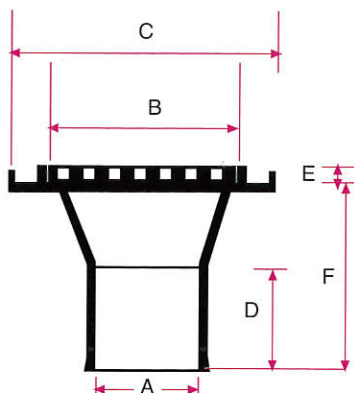


Specification 規格	Dimensions 呎吋						Unit: mm
	A	B	C	D	E	F	
50	50	130	178	55	8	135	
65	65	130	179	55	8	135	
75	75	130	180	90	6	150	
100	100	154	215	94	10	208	
150	150	250	315	90	12	177	
225	225	250	330	100	12	195	
300	300	390	468	100	14	195	

*平冷可改用不銹鋼，D 位尺吋可按客戶要求長度加長。




"G.Y." Brand Square Flat Grating & Seal Hopper "G.Y."牌 方平面脂線梳冷斗

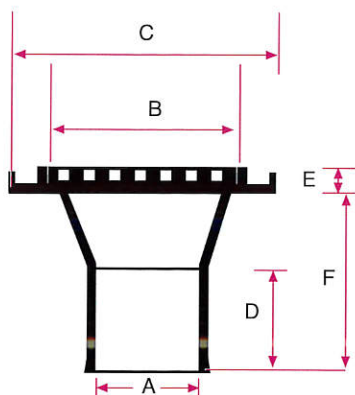

Specification 規格	Dimensions 呎吋						Unit: mm
	A	B	C	D	E	F	
75	75	176	265	100	15	184	
100	100	176	265	100	15	184	
150	150	225	310	150	18	210	
225	225	280	375	150	18	235	
300	300						



"G.Y." Brand Square Dome Grating & Seal Hopper "G.Y."牌 方拱型脂線梳冷斗

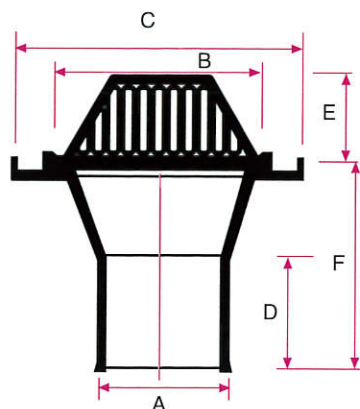

Specification 規格	Dimensions 呎吋						Unit: mm
	A	B	C	D	E	F	
75	75	176	265	100	88	184	
100	100	176	265	100	88	184	
150	150	225	310	150	98	210	
225	225	280	375	150	98	235	
300	300						




BS416生鐵配件

BS416 Cast Iron Fittings

(全部配不銹鋼螺絲)


"G.Y." Brand Water Outlet And Seal Hopper Fitted With Chrome Plated Brass Connector Holding A Stain-Less Steel Circular Grating
"G.Y." 牌 元天面鐵綫斗配內牙盤連銅電白叻外牙斗

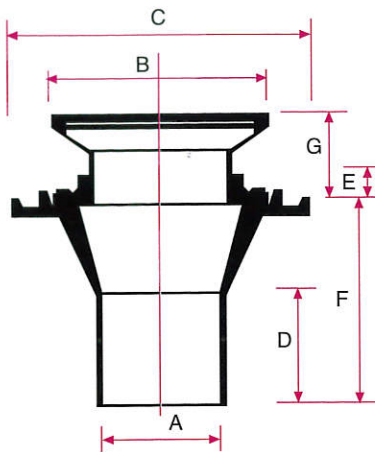

Specification 規格	Dimensions 呎吋						
	A	B	C	D	E	F	G
75	75	150	180	90	6	150	50
100	100	150	215	94	10	208	50
150	150	225	310	90	12	177	75



"G.Y." Brand Floor Drain With Hinged Square Grating
"G.Y." 牌 有較方面地台梳冷斗

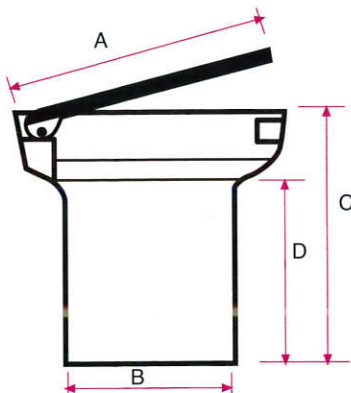


Specification 規格	Dimensions 呎吋			
	A	B	C	D
50	100	50	100	70
75	115	73	125	85
100	150	98	130	90



"G.Y." Brand Three Segment Type Rainwater Outlet With Dome Grating

"G.Y." 牌 元型三件頭天面菊花梳冷斗

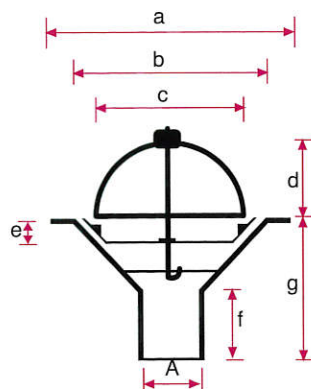

Specification 規格	Dimensions 呎吋							
	A	a	b	c	d	e	f	g
75	75	340	273	200	11	40	115	220
100	100	355	300	220	13	35	130	240
150	100	355	300	280	13	35	130	240




BS437生鐵厚身配件

BS437 Cast Iron Fittings

(全部配不銹鋼螺絲)

"G.Y." Brand BS437 Tee With Door

"G.Y."牌 BS437 有口三叉

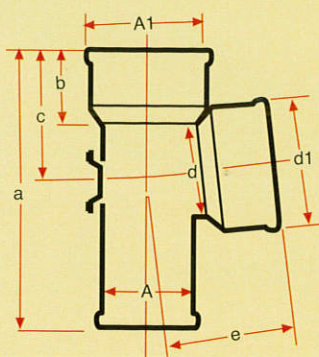


Specification 規格	Dimensions 呎吋						Unit: mm	
	A	a	b	c	d	e	A1	d1
75 x 75	75	305	58	153	75	140	118	118
100 x 75	100	328	80	166	75	164	146	118
100 x 100	100	360	80	154	100	164	146	148
150 x 75	150	362	83	177	75	196	195	118
150 x 100	150	400	90	134	100	180	200	148
150 x 150	150	450	90	215	150	216	200	200
225 x 100	225	535	115	255	100	232	278	148
225 x 150	225	530	115	248	150	238	278	200
225 x 225	225	565	115	246	225	252	278	278
300 x 150	300	548	120	275	150	260	344	200
300 x 225	300	588	120	300	225	315	344	278
300 x 300	300	670	100	343	300	302	355	355



"G.Y." Brand BS437 45° Branch Y-Tee With Door

"G.Y."牌 BS437 有口斜上叉




Specification 規格	Dimensions 呎吋						Unit: mm		
	A	a	b	c	d	e	A1	θ	d1
100 x 100	100	400	78	270	100	270	147	45°	147
150 x 100	150	500	68	300	100	320	198	45°	147
150 x 150	150	510	85	340	150	360	196	45°	196
225 x 75	225	530	115	390	75	375	278	45°	118
225 x 100	225	520	115	410	100	370	278	45°	147
225 x 150	225	570	115	425	150	415	278	45°	196
225 x 225	225	690	115	425	225	460	278	45°	278
300 x 150	300	530	115	440	150	440	350	45°	196
300 x 225	300	670	115	500	225	500	350	45°	278
300 x 300	300	820	115	560	300	560	345	45°	345



"G.Y." Brand BS437 95° Bend With Door

"G.Y."牌 BS437 95° 有口邊



Specification 規格	Dimensions 呎吋				Unit: mm	
	A	a	b	c	A1	θ
75 x 95°	75	128	55	160	115	95°
100 x 95°	100	160	75	170	136	95°
150 x 95°	150	200	90	190	190	95°
225 x 95°	225	235	115	285	276	95°
300 x 95°	300	318	100	318	345	95°




BS437生鐵厚身配件

BS437 Cast Iron Fittings

(全部配不銹鋼螺絲)


"G.Y." Brand BS437 45° Bend With Door "G.Y."牌 BS437 45° 有口邊

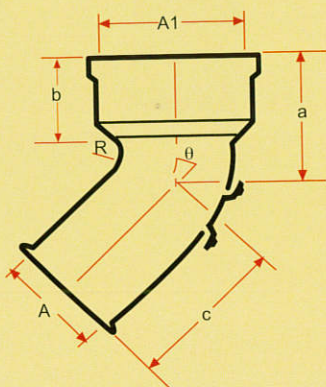

Specification 規格	Dimensions 呎吋					Unit: mm
	A	a	b	c	A1	θ
75 x 45°	75	93	65	160	115	45°
100 x 45°	99	140	75	150	136	45°
150 x 45°	150	170	90	160	190	45°
225 x 45°	225	210	115	190	276	45°
300 x 45°	300	225	100	230	345	45°




"G.Y." Brand BS437 "R" Large Radius Bend "G.Y."牌 BS437 "R" 無口特大彎邊

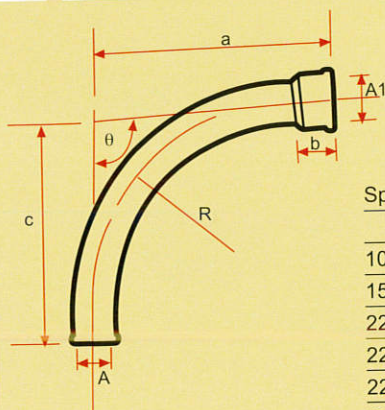

Specification 規格	Dimensions 呎吋					Unit: mm
	A	A1	a	b	C	
100 x 700R	100	137	800	80	700	
150 x 750R	150	190	720	85	780	
225 x 600R	225	275	720	110	760	
225 x 750R	225	276	850	110	850	
225 x 800R	225	276	970	110	920	
300 x 875R	300	355	925	120	1015	



"G.Y." Brand BS437 Radius Bend Without Door "G.Y."牌 BS437 無口大彎邊



Specification 規格	Dimensions 呎吋					Unit: mm
	A	A1	a	b	C	
75	75	114	345	70	345	
100	100	136	355	75	330	
150	150	190	390	90	375	
225	225	282	453	95	485	
300	300	350	480	110	540	




BS437生鐵厚身配件

BS437 Cast Iron Fittings

(全部配不銹鋼螺絲)

"G.Y." Brand BS437 Socket

"G.Y." 牌 BS437 梳杰




Specification 規格	Dimensions 呎吋			Unit : mm
	a	b	c	
75	80	103	100	
100	100	142	135	
150	150	195	150	
200	200	245	164	
225	230	275	173	
250	250	300	176	
300	300	360	207	



"G.Y." Brand BS437 Reducer

"G.Y." 牌 BS437 刁士

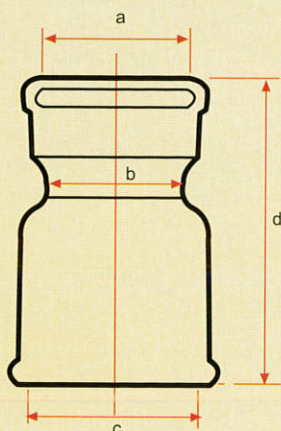


Specification 規格	Dimension 呎吋				Unit : mm
	a	b	c	d	
100 x 75	112	75	99	190	
150 x 100	142	100	149	263	
225 x 150	190	150	225	335	
300 x 225	285	225	310	422	



"G.Y." Brand BS437 Short Pipe With Door

"G.Y." 牌 BS437 有口短垵

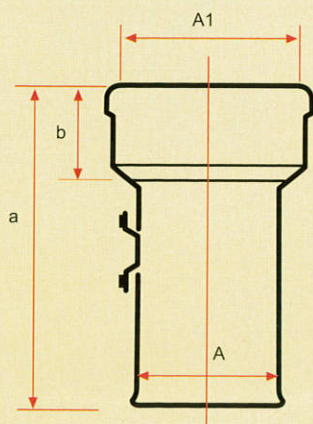

Specification 規格	Dimension 呎吋				Unit : mm
	A	A1	a	b	
100	100	146	320	80	
150	150	198	365	90	
225	225	278	535	115	
300	300	344	530	120	




BS437生鐵厚身配件

BS437 Cast Iron Fittings

(全部配不銹鋼螺絲)


"G.Y." Brand BS437 Deep "P" Trap "G.Y."牌 BS437深水 "P"格氣

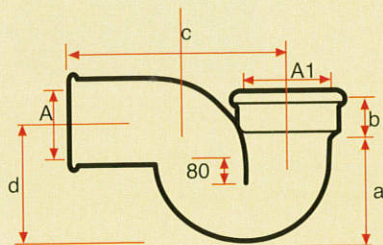

Specification 規格	Dimensions 呎吋						Unit: mm
	A	A1	a	b	c	d	
75	75	114	140	65	250	200	
100	100	136	180	75	295	220	
150	150	190	239	90	420	302	
225	225	283	317	108	535	405	
300	300	360	375	105	670	510	




"G.Y." Brand BS437 Disconnecting Trap With Cap & Chain "G.Y."牌 BS437 狗頭格氣連枳及鉛水鏈

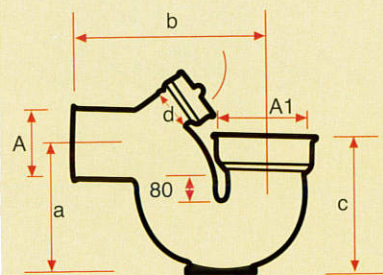

Specification 規格	Dimensions 呎吋						Unit: mm
	A	A1	a	b	c	d	
100 x 100	100	140	233	320	310	100	
150 x 100	150	198	230	440	357	100	
225 x 150	225	275	425	600	440	150	
300 x 150	300	343	535	670	505	150	



"G.Y." Brand PN16 Flanges Socket "G.Y."牌 PN16佛冷梳杰

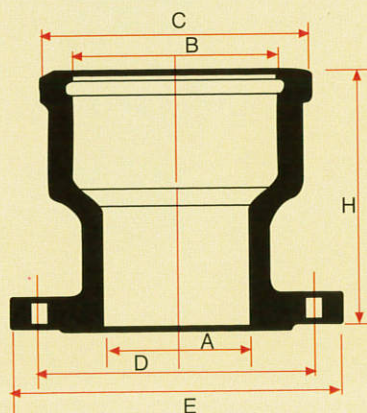

Specification 規格	Dimensions 呎吋						Unit: mm
	A	B	C	D	E	H	
80	80	115	150	160	200	200	
100	100	138	185	180	220	207	
150	150	190	240	240	285	210	
200	200	250	310	295	340	250	
250	250	292	348	355	400	265	
300	300	342	402	410	455	270	




BS4622灰鐵膠圈配件

BS4622 Grey Iron Flexible Joint Fittings

(全部配不銹鋼螺絲)

"G.Y." Brand BS4622 Socket With Flexible Joint

"G.Y." 牌 BS4622 膠圈梳杰




Specification 規格	Dimensions 呎吋		Unit : mm
	a	b	c
100	100	130	150
150	150	176	180
225	230	275	173



"G.Y." Brand BS4622 P Trap With Flexible Joint

"G.Y." 牌 BS4622 膠圈格氣

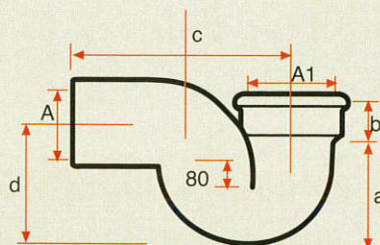


Specification 規格	Dimensions 呎吋					Unit: mm
	A	A1	a	b	c	d
100	100	136	180	75	295	220
150	150	190	239	90	420	302
225	225	283	317	108	535	405



"G.Y." Brand BS4622 Radius Bend With Flexible Joint

"G.Y." 牌 BS4622 膠圈大彎邊

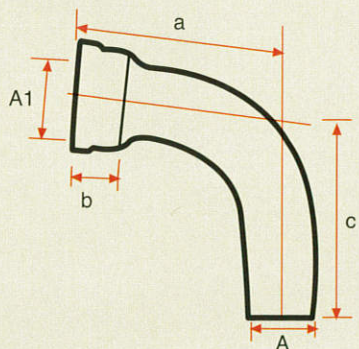

Specification 規格	Dimensions 呎吋				Unit: mm
	A	A1	a	b	C
100	100	136	355	75	330
150	150	190	390	90	375
225	225	282	453	95	485




BS4622灰鐵膠圈配件

BS4622 Grey Iron Flexible Joint Fittings

(全部配不銹鋼螺絲)

"G.Y." Brand BS4622 95° Bend With Flexible Joint

"G.Y."牌 BS4622 膠圈95° 無口邊




Specification 規格	Dimensions 呎吋					Unit: mm	
	A	a	b	c	A1	θ	
100 x 95°	100	160	75	170	136	95°	
150 x 95°	150	200	90	190	190	95°	
225 x 95°	225	235	115	285	276	95°	



"G.Y." Brand BS4622 "R" Large Radius Bend With Flexible Joint

"G.Y."牌 BS4622 膠圈 "R"無口特大彎邊

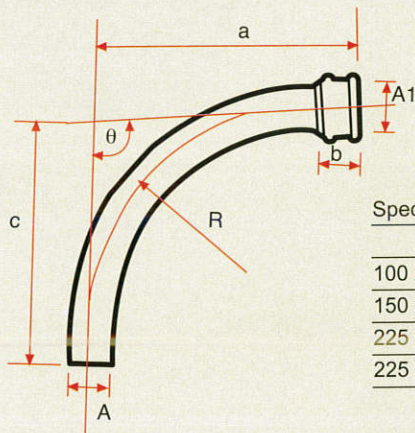


Specification 規格	Dimensions 呎吋					Unit: mm	
	A	A1	a	b	c		
100 x 700R	100	137	800	80	700		
150 x 750R	150	190	720	85	780		
225 x 750R	225	276	850	110	850		
225 x 800R	225	276	970	110	920		



"G.Y." Brand BS4622 Tee With Flexible Joint

"G.Y."牌 BS4622 膠圈三叉

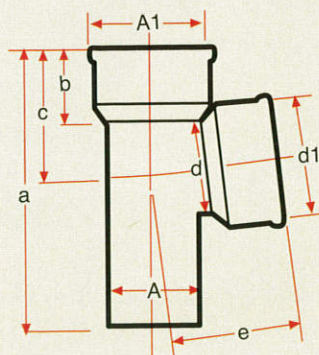

Specification 規格	Dimensions 呎吋								Unit: mm	
	A	a	b	c	d	e	A1	d1		
100 x 75	100	328	80	166	75	164	146	118		
100 x 100	100	360	80	154	100	164	146	148		
150 x 100	150	400	90	134	100	180	200	148		
150 x 150	150	450	90	215	150	216	200	200		
225 x 100	225	535	115	255	100	232	278	148		
225 x 150	225	530	115	248	150	238	278	200		
225 x 225	225	565	115	246	225	252	278	278		
300 x 150	300	548	120	275	150	260	344	200		
300 x 225	300	588	120	300	225	315	344	278		
300 x 300	300	670	100	343	300	302	355	355		




BS4772 /BSEN545佛冷配件

BS4772 /BSEN545 Ductile Iron Fittings

"G.Y." Brand BS4504 Cast Iron Puddle Flange



"G.Y." 牌 BS4504 生鐵雙頭佛冷過缸 PN16

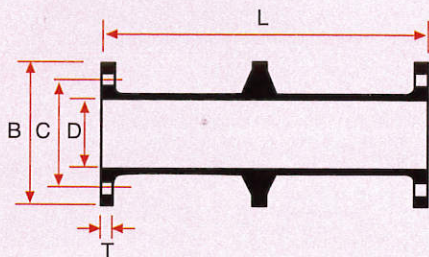

Specification 規格	Dimensions 呎吋					Unit: mm
	D	B	C	T	L	
50	50	165	125	20	350、400、450、500、550、600	
65	65	185	145	20	350、400、450、500、550、600	
80	80	200	160	22	350、400、450、500、550、600	
100	100	220	180	24	350、400、450、500、550、600	
150	150	285	240	26	350、400、450、500、550、600	
200	200	340	295	30	350、400、450、500、550、600	
250	250	405	355	32	350、400、450、500、550、600	

"G.Y." Brand BS4772/BSEN545 Ductile Iron Flanges

"G.Y." 牌 BS4772/BSEN545 球鐵佛冷盤 PN16

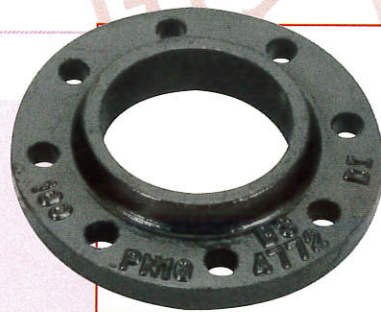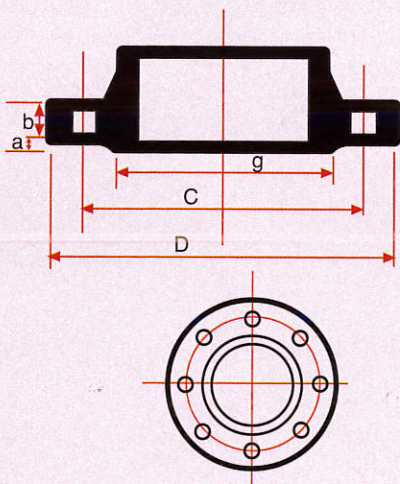


Specification 規格	Dimensions 呎吋			Unit: mm	
	D	C	g	a	b
80	200	160	132	3	16
100	235	190	156	3	16
150	300	250	211	3	17
200	360	310	274	3	19
250	425	370	330	3	21.5
300	485	430	389	4	23.5

BS4772 / BSEN545 佛冷配件

BS4772 / BSEN545 Ductile Iron Fittings

"G.Y." Brand BS4772/BSEN545 Ductile Iron Double Flanged Bend 90°
"G.Y." 牌 BS4772/BSEN545 球鐵90° 有泥佛冷邊

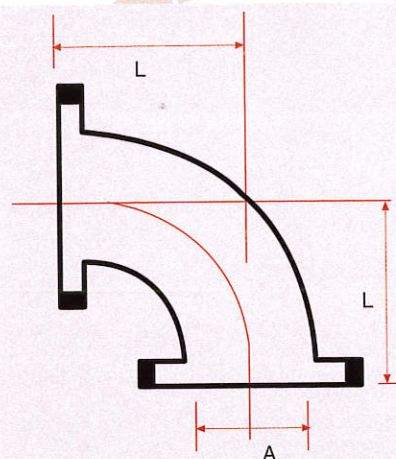


K=12 PN16

Specification 規格	Dimensions 呎吋	Unit: mm
	A	L
80	80	165
100	100	180
150	150	220
200	200	260
250	250	350
300	300	400



"G.Y." Brand BS4772/BSEN545 Ductile Iron Double Flanged Bend 45°
"G.Y." 牌 BS4772/BSEN545 球鐵45° 有泥佛冷邊

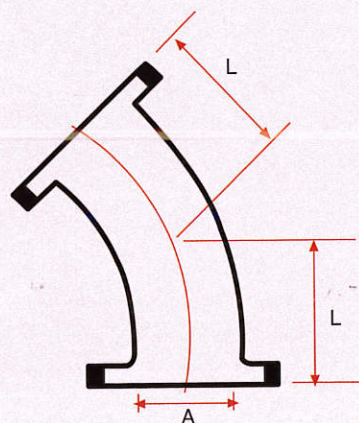

K=12 PN16


Specification 規格	Dimensions 呎吋	Unit: mm
	A	L
80	80	130
100	100	140
150	150	160
200	200	180
250	250	350
300	300	400



BS4772 / BSEN545 佛冷配件

BS4772 / BSEN545 Ductile Iron Fittings

"G.Y." Brand BS4772/BSEN545 Ductile Iron Double Flanged Taper
"G.Y." 牌 BS4772/BSEN545 球鐵有泥佛冷刁士

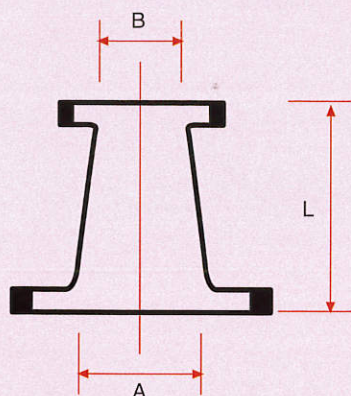


K=12 PN16

Specification 規格	Dimensions 呎 吋		Unit: mm
	A	B	L
80 x 50	80	50	155
100 x 50	100	50	155
100 x 80	100	80	155
150 x 50	150	50	155
150 x 80	150	80	155
150 x 100	150	100	155
200 x 80	200	80	155
200 x 100	200	100	155
200 x 150	200	150	155



"G.Y." Brand BS4772/BSEN545 Ductile Iron Double Flanged Tee
"G.Y." 牌 BS4772/BSEN545 球鐵有泥佛冷三叉

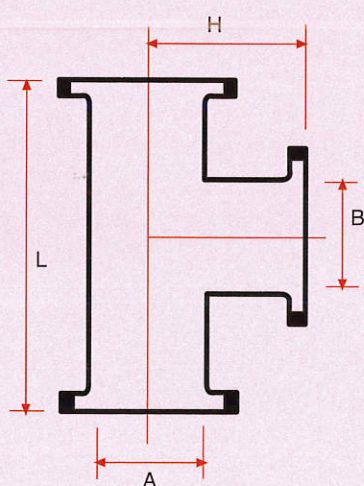

K=14 PN16

Specification 規格	Dimensions 呎 吋				Unit: mm
	A	B	L	H	
80 x 80	80	80	330	165	
100 x 80	100	80	360	175	
100 x 100	100	100	360	180	
150 x 80	150	80	440	205	
150 x 100	150	100	440	210	
150 x 150	150	150	440	220	
200 x 100	200	100	520	240	
200 x 150	200	150	520	250	
200 x 200	200	200	520	260	
250 x 80	250	80	700	270	
250 x 100	250	100	700	275	
250 x 150	250	150	700	325	
250 x 200	250	200	700	325	
250 x 250	250	250	700	350	






房屋署 (Hong Kong Housing Authority)

承建商 Contractor	地盤 Site
中國建築工程總公司 China State Construction Engineering Corp	葵盛東二、四期 Kwai Shing East Estate Phase II, IV
保華德祥建築有限公司 Paul Y ITC Construction Co, Ltd	慈安苑二期 Tsz On Court Phase II
禮頓建築(亞洲)有限公司 Leighton Construction (Asia) Ltd	慈安苑四期 Tsz On Court Phase IV
瑞安承建有限公司 Shun On Bldg Contractors Ltd	何文田南三、四期 Ho Man Tin South Phase III, IV
其士建築有限公司 Chevalier (Construction) Co, Ltd.	瓊山苑二期 King Shan Court Phase II
俊和建築工程有限公司 Chun Wo Bldg. Construction Ltd	幸俊苑 Hang Chun Court
順成建築工程有限公司 Shun Shing Construction & Engineering Co, Ltd	深灣雅濶閣 Sham Wan Broadview Court
新福港營造有限公司 Sun Fook Kong Construction Ltd	天水圍3期 Tin Shui Wai Phase III
鴻運建築有限公司 Hung Wan Construction Co, Ltd	藍田八期 Nam Tin Phase VIII 天水圍31區四期 Tin Shui Wai Area 31 Phase IV
新昌營造集團有限公司 Hsin Chong Construction Group Ltd	天水圍101區 Tin Shui Wai Area 101
金門建築有限公司 Gammon Construction Ltd	秀茂坪9期 Sau Mau Ping Phase IX 慈民二期 Tsz Man Estate Phase II
正宏工程有限公司 Chatwin Engineering Ltd	東涌31區一期 Tung Chung Area 31 Phase I

房屋協會(Hong Kong Housing Society)

承建商 Contractor	地盤 Site
瑞安承建有限公司 Shun On Bldg Contractors Ltd	沙田馬鞍山77區夾屋 Sha Tin Ma On Shan Area 77
大同建築有限公司 Daido Construction Co., Ltd.	沙田馬鞍山雅景台 Sha Tin Ma On Shan Park Belvedere

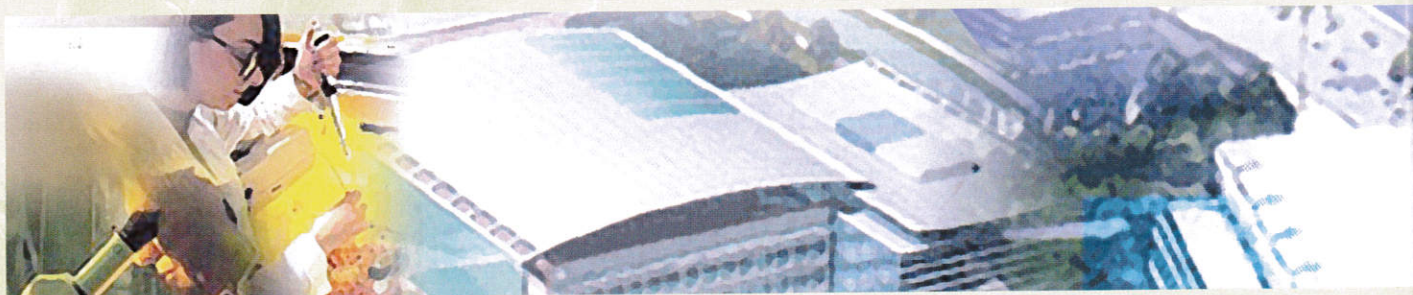

建築署 Architectural Services Department

柴灣市政大樓 Chai Wan Complex Building

落馬洲管制站 Lok Ma Chau Terminal New Territories

香港科學園 Hong Kong Science Park

本公司陸續向新開的地盤供貨，包括新的品種，如有需要請向本公司查詢。

We keep on providing the material including the new products for new contractor.
Please feel free to ask for any requirement.



發展商(Developer)

發展商 Developer	地盤 Site	發展商 Developer	地盤 Site
新鴻基地產發展有限公司 Sun Hung Kai Properties Limited 新世界發展有限公司 New World Development Co, Ltd.	元朗采葉庭 The Parcville	新鴻基地產發展有限公司 Sun Hung Kai Properties Limited 恆基兆業地產有限公司 Henderson Land Development Co, Ltd.	紅磡半島豪庭 Royal Peninsula
恆基兆業地產有限公司 Henderson Land Development Co, Ltd.	疊茵庭 Parkland Villas	華懋集團 Chinachemgroup	沙田碧濤花園 Pictorial Garden
長江實業(集團)有限公司 Cheung Kong(Holdings) Limited	紅磡海逸豪園 Laguna Verde	信和集團 Sino Group	藍灣半島 Island Resort
新鴻基地產發展有限公司 Sun Hung Kai Properties Limited 太古地產 Swire Properties	維景灣畔 Ocean Shores	嘉華地產 K.Wah Properties	屯門嘉悅半島 The Sea Cret
華潤(集團)有限公司 China Resources(Holdings) Co, Ltd. 新鴻基地產發展有限公司 Sun Hung Kai Properties Limited	青衣瀝景灣 Villa Esplanada	英皇集團 Emperor Group	龍成花園 JC Place
		市區重建局 Urban Renewal Authority (URA) 新世界發展有限公司 New World Development Co, Ltd. 長江實業(集團)有限公司 Cheung Kong(Holdings) Limited	帝后華庭 Queens Terrace

其他(公共設施) : Others(Public Facilities)

中環及青衣機場鐵路 Airport Express(Tsing Yi & Central Station)
西北鐵路(美孚、荃灣、錦田、元朗、朗屏站) KCR-West Rail
將軍澳東鐵 KCR-East Rail
香港會議展覽中心新翼 HKCEC New Wing
將軍澳靈實醫院 Haven of Hope Hospital
新機場貨運大樓 Hong Kong International Airport - Cargo Terminal



本公司陸續向新開的地盤供貨，包括新的品種，如有需要請向本公司查詢。

We keep on providing the material including the new products for new contractor.
Please feel free to ask for any requirement.