

“G.Y.”牌鑄鐵管系列

“G.Y.” BRAND CAST IRON PIPES



GY

俊業五金鑄造有限公司
Gent-Year Metal Foundry Limited

「公司簡介」INTRODUCTION

本公司是經銷水喉、渠務及建築行業使用的生鐵、球鐵產品的專業公司，其創立的品牌"G.Y."牌各類產品確保質量，避免與其他牌子混淆。主要產品有符合BS416、BS437、BS1211、BS4622和EN877標準的(規格Ø50mm至Ø700mm)鑄管及配件；符合BS497/EN124標準的沙井蓋板及明渠梳冷，還有符合BS4772/EN545的球鐵配件以及可按客戶的要求或來圖生產特殊的非標準產品及不銹鋼精鑄產品等。

本公司在廣東省中山市自設佔地7,000M²的鑄造工廠，該廠擁有經驗豐富的優秀技術管理人員及工人，現代化設備廠房，用先進的技術生產符合客戶要求的高質產品。

為保障客戶的急需，本公司在新界元朗設有佔地4,000M²的倉庫，儲存足夠應付日常需求的各類產品，保證及時送貨到地盤。

多年來，隨着產品質量及服務質素的不斷提高，"G.Y."牌產品獲得本港多間大型發展商、承建商及政府有關部門青睞。本着精益求精的精神，並參考客戶反饋的意見，繼續對產品進行改進，力求做到更好。

本公司一貫秉承"品種齊備，品質第一，送貨及時"的宗旨，為廣大用戶提供優質的產品及服務。

GENT-YEAR METAL FOUNDRY LTD.

Our company specializes in manufacturing and supplying of high quality pumping, drainage, cast-iron and ductile iron products for various drainage and construction projects. Our "G.Y." brand provides a variety of products with high quality and is easily distinguished from the others. The main products include Cast Iron Pipes and Fittings which comply with the BS416, BS437, BS1211, BS4622 and EN877 standards (Ø50mm - Ø700mm), Manhole Covers, Frames and Channel Gratings which meet BS497/EN124 standards and the BS4772/EN545 Ductile Iron Fittings. We also produce tailor-made products, including stainless steel products, in accordance with client's specifications or drawings.

We have a 7,000 sq.m. foundry in ZhongShan, Guangdong, China for manufacturing high quality products. Being run by the excellent technicians and administrative staff, the foundry fully makes use of the latest facilities and techniques in production process to meet all clients' requirements.

To address the urgent needs of our clients, we have also set up a 4,000 sq.m. storage site in Yuen Long, N.T., Hong Kong with sufficient high quality stock ready for timely delivery to any sites in Hong Kong.

Over the years, with the continuous improvement in the quality of products and services, our "G.Y." products have been well recognized and adopted by many large developers/contractors and government departments in Hong Kong. Following the spirit of striving for the best and the valuable clients' feedback, we are trying harder to enhance our products and services to the best.

Our principle is to provide the clients with variety of products, excellent quality and timely delivery. We will endeavor to make you experience our excellent products and services in the industry.



俊業五金鑄造有限公司

Gent-Year Metal Foundry Limited

版權所有，翻印必究
All Rights Reserved

Tel : 2473 2996 Fax : 2473 2887



生產過程 Manufacturing Process



1) 澆鑄 Pouring Liquid Iron



2) 拉管 Continuous Casting Process



3) 切割 Cutting




4) 試水壓 Water Pressure Testing



5) 完備的檢測 Comprehensive Testing

連續鑄鐵及離心澆鑄承插口臭氣管採用優質生鐵按英國B.S.416標準設計生產，堅固美觀，厚薄均勻，經0.5bar水壓試驗合格，適合現代高層大廈作排放污水及雨水之用。Ø75、Ø100及Ø150三種管均內襯水泥，使其內壁更光滑，管的內外壁均塗瀝青漆，符合B.S.3416的標準。

B.S. 416 Cast Iron Spigot and Socket Soil Pipes made by continuous and centrifugal process are made from high quality pig iron in accordance with the British Standard B.S. 416. They have passed the hydraulic pressure test at 0.5 Bar that they are ideal for sewage and rainwater disposal in the modern high-rise buildings. Ø75mm, Ø100mm and Ø150mm pipes with inner cement layer make the inner surface much smoother. These pipes are tough in strength, nice in appearance and even in wall thickness. Their inner and outer surfaces are also coated by bitumen to comply with the B.S.3416.

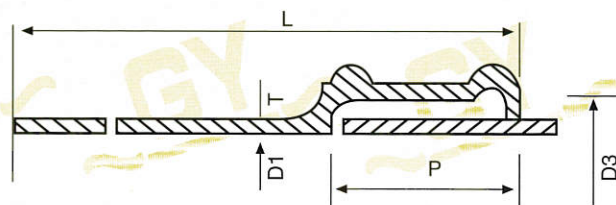

Specification 規格		Int. dia 內徑	Thick 壁厚	Dimensions 各部尺寸 unit: mm		
ø mm x mm	Inch x feet	D1	T	D3	P	L
50 x 1830	2" x 6'	50	4.5	73	63	1830
75 x 1830	3" x 6'	75	4.5	100	70	1830
100 x 1830	4" x 6'	100	4.5	127	76	1830
150 x 1830	6" x 6'	150	5	181	89	1830
225 x 1830	9" x 6'	225	6.5	273	81	1830
300 x 1830	12" x 6'	300	7.5	351	114	1830

- 上述尺寸僅供參考。
- 鑄造產品允許±5%公差。
- 上述產品各部位尺寸的最終解釋權在本公司。

- The above dimensions are for reference only
- ±5% deviation is allowed for product producing
- The final right of explanation for every part of the size of the products is reserved by our company for the above products.


"G.Y."牌B.S.437 鑄鐵承插口地渠重管

"G.Y." BRAND B.S.437 Cast Iron Spigot & Socket Drain Pipes
Made by Casting Process

B.S.437 生鐵地渠重管
Cast Iron Drain Pipe To B.S. 437

連續鑄鐵及離心澆鑄承插口地渠重管主要用於地下鋪砌管道排放污水和雨水，管體壁厚均勻，尺寸規格按英國B.S.437設計生產，經345kPa水壓試驗合格，并能承受較大的外部壓力。Ø100mm及Ø150mm兩種管均內襯水泥，使其內壁更光滑。管內外壁油瀝青漆均符合B.S.3416的標準。

B.S.437 Cast Iron Spigot and Socket Drain Pipes made by continuous and centrifugal process are used for underground draining of sewage and rainwater. These pipes are even in wall thickness and are produced in accordance with the British Standard B.S. 437. They have passed the hydraulic pressure test at 345kPa that they can stand higher outer pressure. Ø100mm, Ø150mm pipes with inner cement layer make the inner surface much smoother. Their inner and outer surfaces are also coated by bitumen to comply with the B.S. 3416.

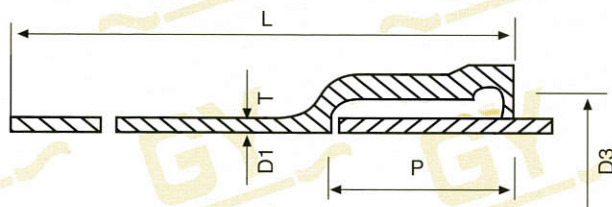

Specification 規格		Int. dia 內徑	Thick 壁厚	Dimensions 各部尺寸 unit: mm		
ø mm x mm	Inch x feet	D1	T	D3	P	L
75 x 1830	3" x 6'	75	7	113	76	1830
100 x 1830	4" x 6'	100	7	138	76	1830
150 x 1830	6" x 6'	150	9	188	90	1830
225 x 1830	9" x 6'	225	10	265	103	1830
300 x 1830	12" x 6'	298	11	342	112	1830
375 x 2000	15" x 2M	373	12	415	120	2000
450 x 2000	18" x 2M	447	16	496	125	2000

- 上述尺寸僅供參考。
- 鑄造產品允許±5%公差。
- 上述產品各部位尺寸的最終解釋權在本公司。

- The above dimensions are for reference only
- ±5% deviation is allowed for product producing
- The final right of explanation for every part of the size of the products is reserved by our company for the above products.



俊業五金鑄造有限公司

Gent-Year Metal Foundry Limited

版權所有，翻印必究
All Rights Reserved

Tel : 2473 2996 Fax : 2473 2887

連續鑄鐵承插口壓力管適用於供水，輸氣或排污使用，水壓試驗壓力為500psi，符合英國標準B.S. 1211。連續鑄鐵承插口壓力管規格齊全，管表面光滑，厚度均勻，管內外塗瀝青漆均符合B.S.3416的標準。

B.S. 1211 Cast Iron Spigot and Socket Pressure Pipes made by continuous casting process are generally used for conveyance of water, gas or sewage. They have passed the hydraulic pressure test at 500psi and comply with the British Standard B.S. 1211. These pipes with smooth surface and even thickness have complete variety and size. Their inner and outer surface are also coated by bitumen to comply with the B.S. 3416.



Specification 規格	Int. dia 內徑	Thick 壁厚	Dimensions	各部尺寸 unit: mm	
ø mm x mm	D1	T	D3	P	L
75 x 4000	75	8	113	80	4110
100 x 4000	100	8	139	90	4110
150 x 4000	150	9	189	100	4110
200 x 4000	200	9	240	100	4110
225 x 4000	225	9.5	265	100	4120
250 x 4000	250	10	293	103	4120
300 x 4000	298	11	345	110	4120
350 x 4000	348	12	398	120	4120
375 x 4000	373	13	421	120	4120
400 x 4000	398	13	448	124	4120
450 x 5000	448	14	498	129	5130
500 x 5000	497	15	553	130	5130
525 x 5000	522	15	572	130	5130
600 x 5000	596	17	654	136	5130
700 x 5000	696	17	756	142	5130

- 上述尺寸僅供參考。
- 鑄造產品允許±5%公差。
- 上述產品各部位尺寸的最終解釋權在本公司。

- The above dimensions are for reference only
- ±5% deviation is allowed for product producing
- The final right of explanation for every part of the size of the products is reserved by our company for the above products.

“G.Y.”牌B.S.4622 灰鐵承插口壓力管

“G.Y.”BRAND B.S.4622 Grey Iron Lead-Caulked Joint Pressure Pipes

B.S.4622灰鐵壓力管
Grey Iron Pressure Pipe To B.S.4622

該灰鐵壓力管適用於供水，輸氣或排污使用，水壓試驗壓力為35Bar，符合英國標準B.S.4622。其規格齊全，管表面光滑，厚度均勻，管內外塗瀝青漆均符合B.S.3416的標準。

B.S. 4622 Grey Iron Lead-Caulked Joint Pressure Pipes are generally used for conveyance of water, gas or sewage. They have passed the hydraulic pressure test at 35 Bar and comply with the British Standard B.S. 4622. These pipes with smooth surface and even thickness have complete variety and size. Their inner and outer surface are also coated by bitumen to comply with the B.S.3416.




Specification 規格	Int. dia 內徑	Thick 壁厚	Dimensions 各部尺寸	unit: mm
ø mm x mm	D1	T	D3 P L	
75 x 4000	75	8	113 80 4110	
100 x 4000	100	8	139 90 4110	
150 x 4000	150	9	189 100 4110	
200 x 4000	200	9	240 100 4110	
225 x 4000	225	9.5	265 100 4120	
250 x 4000	250	10	293 103 4120	
300 x 4000	298	11	345 110 4120	
350 x 4000	348	12	398 120 4120	
375 x 4000	373	13	421 120 4120	
400 x 4000	398	13	448 124 4120	
450 x 5000	448	14	498 129 5130	
500 x 5000	497	15	553 130 5130	
525 x 5000	522	15	572 130 5130	
600 x 5000	596	17	654 136 5130	
700 x 5000	696	17	756 142 5130	

- 上述尺寸僅供參考。
- 鑄造產品允許±5%公差。
- 上述產品各部位尺寸的最終解釋權在本公司。

- The above dimensions are for reference only
- ±5% deviation is allowed for product producing
- The final right of explanation for every part of the size of the products is reserved by our company for the above products.

連續鑄鐵及離心澆鑄柔性接口(膠圈)排污重管管體尺寸規格按英國B.S.437標準設計生產，經345kPa水壓試驗合格，管與管之間的接口不用填料，而用橡膠圈密封，管道安裝方便簡易，對地基下沉，地形複雜及對一定裂度的地震適應性強。Ø100mm及Ø150mm兩種管均內襯水泥，使其內壁更光滑。管內外壁塗瀝青漆均符合B.S.3416的標準。

B.S. 437 Cast Iron Flexible Joint Drain Pipes made by continuous and centrifugal process are produced in accordance with the British Standard B.S. 437. They have passed the hydraulic pressure test at 345kPa. The joint between pipes is sealed by rubber ring without any packing. These pipes are easy to lay and install and are highly adaptable to the foundation subsidence and certain seismic intensity. Ø100mm, Ø150mm pipes with inner cement layer make the inner surface much smoother. Their inner and outer surfaces are also coated by bitumen to comply with the B.S. 3416.

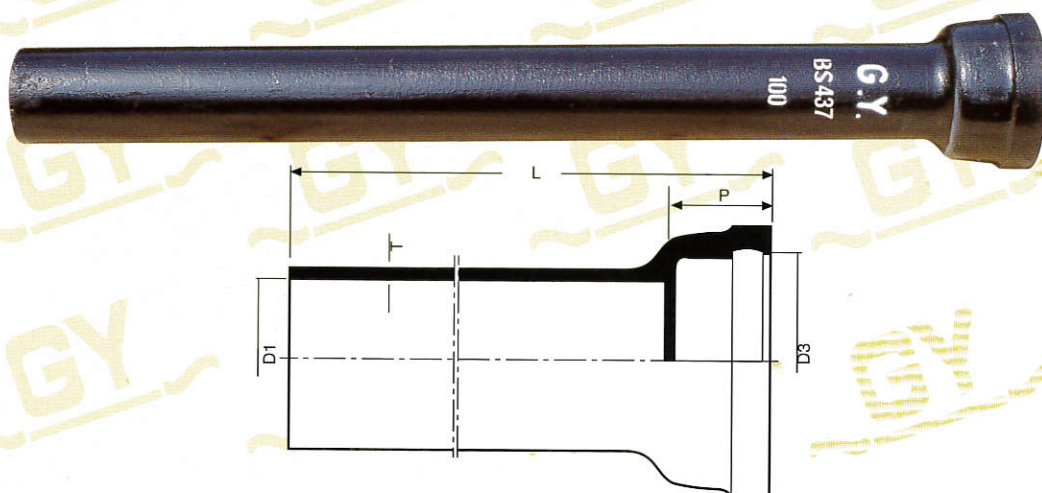

Specification 規格		Int. dia 內徑	Thick 壁厚	Dimensions 各部尺寸 unit: mm		
ø mm x mm	Inch x feet	D1	T	D3	P	L
75 x 1830	3" x 6'	75	7	103	100	1830
100 x 1830	4" x 6'	100	7.5	126	96	1830
150 x 1830	6" x 6'	150	8.5	176	100	1830
225 x 1830	9" x 6'	225	9.5	256	105	1830
300 x 1830	12" x 6'	299	11	328	110	1830
375 x 2000	15" x 2M	374	11.5	345	112	2000
450 x 2000	18" x 2M	445	13	480	119	2000

- 上述尺寸僅供參考。
- 鑄造產品允許±5%公差。
- 上述產品各部位尺寸的最終解釋權在本公司。

- The above dimensions are for reference only
- ±5% deviation is allowed for product producing
- The final right of explanation for every part of the size of the products is reserved by our company for the above products.

“G.Y.”牌B.S.4622灰鐵柔性接口(膠圈)壓力管


“G.Y.”BRAND B.S.4622 Grey Iron Flexible Joint Pressure Pipes

B.S.4622灰鐵膠圈壓力管

Grey Iron Flexible Joint Pressure Pipe To B.S.4622

灰鐵柔性接口(膠圈)壓力管適用於供水、輸氣或排污使用，水壓試驗壓力為35Bar，符合英國標準B.S.4622。其管道施工安裝簡易，管之間的接口不用填料，而用橡膠圈密封，對地基下沉及對一定裂度的地震適應性強。管內外壁塗瀝青漆均符合B.S.3416的標準。

B.S. 4622 Grey Iron Flexible Joint Pressure Pipes made by continuous and centrifugal process are generally used for conveyance of water, gas or sewage. They have passed the hydraulic pressure test at 35Bar and comply with the British Standard B.S. 4622. The joint between pipes is sealed by rubber ring without any packing. These pipes are easy to lay and install and are highly adaptable to the foundation subsidence and certain seismic intensity. Their inner and outer surfaces are also coated by bitumen to comply with the B.S. 3416.

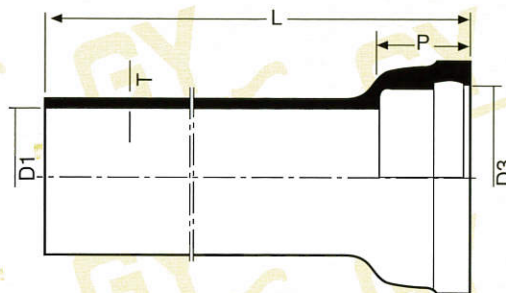

Specification 規格	Int. dia 內徑	Thick 壁厚	Dimensions 各部尺寸			unit: mm
ø mm x mm	D1	T	D3	P	L	
75 x 4000	75	9	101	100	4110	
100 x 4000	100	8.5	126	95	4110	
150 x 4000	150	9.5	177	100	4110	
200 x 4000	200	10.5	228	100	4110	
225 x 4000	225	10	256	105	4110	
250 x 4000	250	11	280	105	4110	
300 x 4000	300	11.5	330	110	4120	
350 x 4000	348	13	384	110	4120	
375 x 2000	375	14	407	110	2000	
375 x 4000	375	14	407	110	4120	
400 x 4000	398	14	433	110	4120	
450 x 2000	448	14.5	484	115	2000	
450 x 5000	448	14.5	484	115	5130	
500 x 5000	497	15	535	115	5130	
525 x 5000	523	15	558	115	5130	
600 x 5000	597	17	639	120	5130	
700 x 5000	697	18	742	140	5130	

- 上述尺寸僅供參考。
- 鑄造產品允許±5%公差。
- 上述產品各部位尺寸的最終解釋權在本公司。

- The above dimensions are for reference only
- ±5% deviation is allowed for product producing
- The final right of explanation for every part of the size of the products is reserved by our company for the above products.

房屋署 Hong Kong Housing Authority

承建商 Contractor

禮頓建築(亞洲)有限公司
Leighton Contractors (Asia) Limited

興勝建築有限公司
Hanison Construction Co, Ltd

保華德祥營造有限公司
Paul Y.-ITC General Contractors Ltd

協興建築有限公司
Hip Hing Construction Co, Ltd.

地盤 Site

油塘東隧一期
Eastern Harbour Crossing Site Phase 1

石蔭邨五期
Shek Yam Estate Phase 5

石硤尾一期重建
Redevelopment of Shek Kip Mei Estate Phase 1

梨木樹三期
Lei Muk Shue Estate Phase 3

建築署 Architectural Services Department

本港二百多間中小學基建及擴建工程
Over 200 Primary & Secondary School Construction and Extension in Hong Kong

屋邨維修保養 Estate Repair & Maintenance

屯門安定邨、友愛邨、蝴蝶邨
On Ting Est, Yau Oi Est & Butterfly Est in Tuen Mun

元朗朗屏邨 Long Ping Estate in Yuen Long

石籬邨二期 Shek Lei Estate Phase 2

葵盛東邨 Kwai Shing East Estate

官塘翠屏邨 Tsui Ping Estate in Kwun Tong

荔景邨
Lai King Estate

葵興邨 Kwai Hing Estate

大埔廣福邨 Kwong Fuk Estate in Tai Po

順利邨商場 Commercial Centre of Shun Lee Estate

沙田美林邨 Mei Lam Estate in Shatin

發展商 Developer

發展商 Developer

盈科大衍地產發展有限公司
Pacific Century Premium Developments Ltd

新鴻基地產發展有限公司
Sun Hung Kai Properties Limited

華人置業集團
Chinese Estates Group

新鴻基地產發展有限公司
Sun Hung Kai Properties Limited

新鴻基地產發展有限公司
Sun Hung Kai Properties Limited

泛海國際集團有限公司
Asia Standard International Group Limited

恆隆地產有限公司
Hang Lung Property Limited

新鴻基地產發展有限公司
Sun Hung Kai Properties Limited

新鴻基地產發展有限公司
Sun Hung Kai Properties Limited

新鴻基地產發展有限公司
Sun Hung Kai Properties Limited

長江實業(集團)有限公司
Cheung Kong(Holdings) Limited

和記黃埔有限公司
Hutchison Wampao Limited

地盤 Site

貝沙灣
Residence Bel-Air

農圃道18號
No.18 Farm Road

上水營盤DD100
DD100 Sheung Shui, Ying Pun

金沙西岸
Canary West

創紀之城五期
Millennium City 5

星灣峰
The Oakridge

碧海藍天
AquaMarine

深灣軒
Sham Wan Towers

聚康山莊
Beneville

YOHO Town

藍澄灣
Rambler Crest



本公司陸續向新開的地盤供貨，包括新的品種，如有需要請向本公司查詢。

We keep on providing the material including the new products for new contractor. Please feel free to ask for any requirement.

發展商 Developer

發展商Developer

信和集團
Sino Group

富豪酒店國際控股有限公司
Regal Hotels International Holdings Limited
中國海外地產有限公司
China Overseas Property Limited

Maple Crest Development Limited
(Joint venture company between Kerry Properties Limited and Kai Tai Group)
(為嘉里建設及啟泰集團合資擁有公司)

九龍建業有限公司
Kowloon Development Company Limited

恆基兆業地產有限公司
Henderson Land Development Co, Ltd

長江實業(集團)有限公司
Cheung Kong(Holdings) Limited

信和集團
Sino Group

嘉華國際集團有限公司
K.Wah International Holdings Limited

嘉華地產(集團)有限公司
K.Wah Properties (Holdings) Limited

華人置業集團
Chinese Estates Group

泛海國際集團有限公司
Asia Standard International Group Limited

恆隆地產有限公司
Hang Lung Property Limited

Uttoxeter Limited

新鴻基地產發展有限公司
Sun Hung Kai Properties Limited

地盤Site

帝庭居
Imperial Villas

富豪海灣
Regalia Bay

滌濤山
Constellation Cove

栢德豪庭
Padek Palace

豪峰軒
The Pinnacle

朗逸峰
The Cairnhill


嘉珀山
The Caldecott

肇輝台8號
No.8 Shiu Fai Terrace

名賢居
Napa Valley

逸濤灣
Les Saisons

珀麗灣
ParkIsland



• Regalia Bay

其他(公共設施) Others(Public Facilities)

香港迪士尼樂園及其酒店
Hong Kong Disneyland & Hotel

美心集團總廠房
Foundry of Maxims Group

東方日報集團總廠房
Foundry of Oriental Daily News Group

屯門藍地妙法寺
Miu Fat Buddhist Monastery in Nam Tei of Tuen Mun



• Hong Kong Disneyland & Hotel

青山醫院二期重建
Redevelopment of Castle Peak Hospital Phase 2

荃灣五號幹線
Route 5(Tsuen Wan)

9號貨櫃碼頭
Container Terminal No.9

澳門金沙娛樂場
Sands Macau

沙田馬場
Sha Tin Racecourse



• Sands Macau

本公司陸續向新開的地盤供貨，包括新的品種，如有需要請向本公司查詢。

We keep on providing the material including the new products for new contractor. Please feel free to ask for any requirement.



俊業五金鑄造有限公司

Gent-Year Metal Foundry Limited

版權所有，翻印必究
All Rights Reserved

Tel : 2473 2996 Fax : 2473 2887